


TOOLING TYPE	TOOLING NO.
(P1)	MPM-0561
(P1)	MPM-0666
(P2)	MPM-0619
(P2)	MPM-0079

REVISIONS				
REV.	ECN NO.	DESCRIPTION	DRAW	DATE

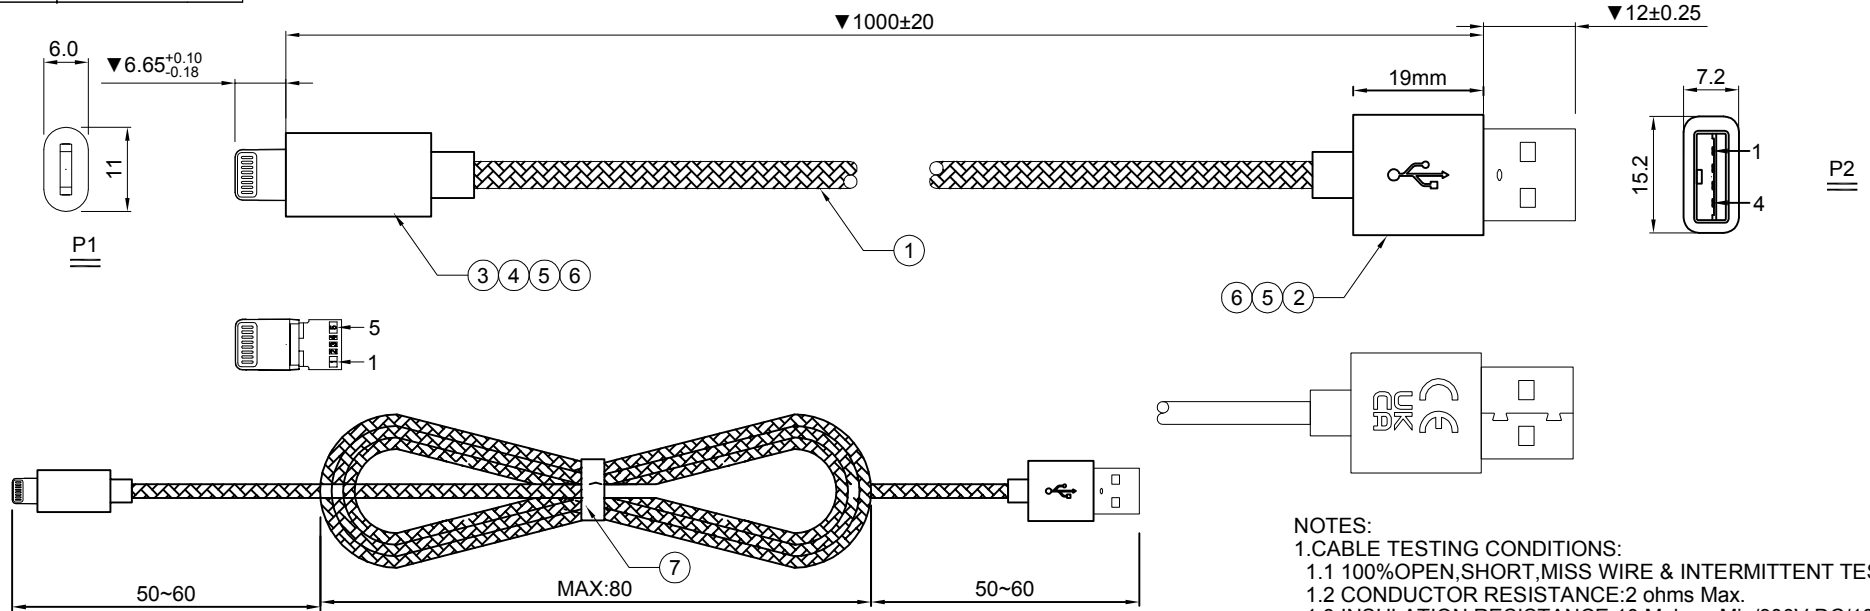


- NOTES:
- CABLE TESTING CONDITIONS:
    - 100% OPEN, SHORT, MISS WIRE & INTERMITTENT TEST.
    - CONDUCTOR RESISTANCE: 2 ohms Max.
    - INSULATION RESISTANCE: 10 Mohms Min/300V DC/10ms.
  - ALL APPLICABLE MATERIAL AND PROCESS CONTROL MUST BE IN COMPLIANCE WITH ROHS2.0 RESTRICTED SUBSTANCE.
  - MARK ▼ AS THE KEY CONTROL DIMENSION.

SHELL	SHIELD	DRAIN+BRAID	SHELL
5	GND		4
4	NC		NC
3	D+	GREEN	3
2	D-	WHITE	2
1	VBUS	RED	1
P1	SIGNAL	COLOR	P2

WIRE CONNECTION TABLE

7	OTH-CA0010132	Ties	Magic tape, Black, Size: 12.5*1.2cm,	1	PCS
6	OTH-000000201	OVERMOLD	45P pvc Silver /REACH/CA65	0.008	KG
5	OTH-000000174	INNERMOLD	PE,CLEAR/REACH/ROHS2.0/SCCP/17P	0.004	KG
4	MMT-CA7903400	SHELL	SUS,NICKEL PLATED	1	PCS
3	ETT-IPH5C8900	CONNECTOR	C189,SUS,WHITE PBT,AU 30"WITH/IC	1	PCS
2	ETC-D04205000	CONNECTOR	USB2.0 AM,PIN G/F,PBT WHITE,SHELL NICKEL	1	PCS
1	EWD-436100010	CABLE	23AWG (53/0.08TC) (ID: 1.0 HDPE) *2C+30AWG (11/0.08TC) (ID: 0.7 HDPE) *2C+AL+B (16/10/0.06TC) /BLACK PVC+Silver Braid/OD=3.6MM	1	M
ITEM	PART NO.	NAME	DESCRIPTION	Q'TY	UNIT

X±1	X°	Customer NO: C6015
.X±0.3	.X°	Customer P/N: NA
.XX±0.20	.XX°	PART NO. FCA2507 FCA2509
.XXX±0.100	.XXX°	TITLE: USB2.0 AM TO Lightning(C89)
UNITS:	mm	DRAW: 2022.09.26
		DWG NO: FCA2507 FCA2509
		CHKD:
APPD:		SCALE SHEET REV.

SCALE	SHEET	REV.
1:1	1/1	A0

8 7 6 5 4 3 2 1