
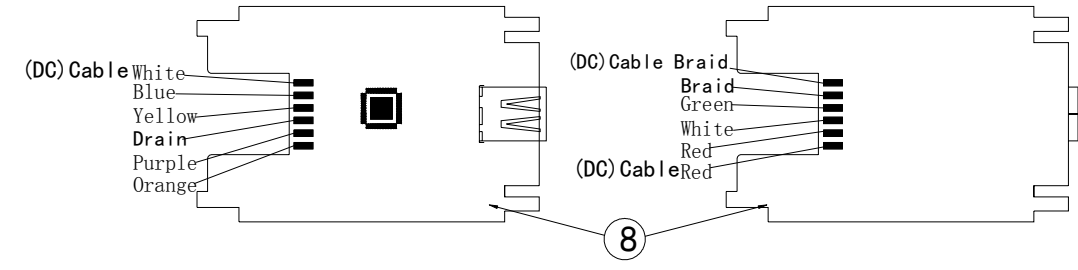
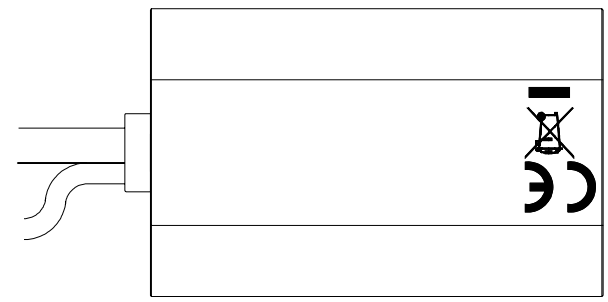
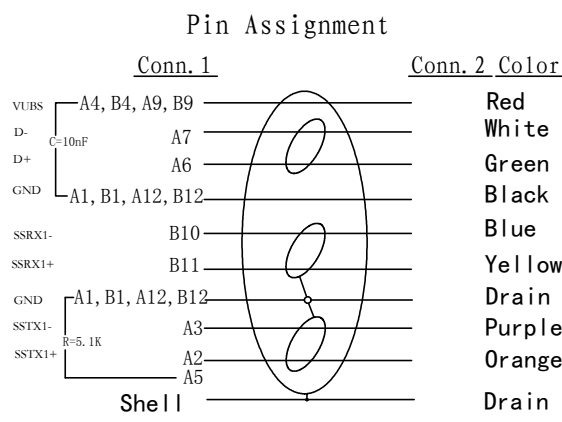


**Conn. 1 USB3.1 CM**

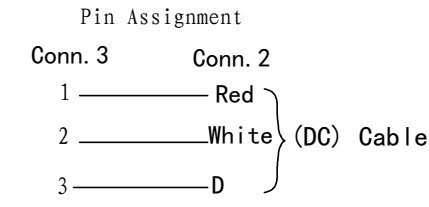

- All Materials With RoHS Standard
- 100% test when it is open and short

**MATERIAL LIST:**

NO.	NAME	DESCRIPTION	UNIT	Q' TY
1	CABLE	USB3.0 (28AWG*2C+D+AL+MY)*2P+28AWG*1P+22AWG*1C+ADB(16/11/0.08TC) OD:4.6mm Jacket Color:BLACK UL2725 USB2.0 30AWG*2C+24AWG*1C+D+AL+B(16*4/0.1TC) OD:2.8±0.15mm Jacket Color:BLACK	pcs	1
2	CONNECTOR	USB3.1 C Male Type Pin Gold Plated Insulation:Black Shell Nickel Plated (R=5.1K±5%, C=10nF±10%)	pcs	1
3	CONNECTOR	DC 3.5 Female, Gold Plated Pin	pcs	1
4		USB CM	pcs	1
5	OUTER MOLD	40P PVC Color:Black	g	12
6	INNER MOLD	LD PE INNER JACKET	g	2
7		ACT+CE....."	pcs	1
8	PCB`A	PCB`A	pcs	1

0		
	REV: A/0	
UNIT: mm	DWG NO: CP201201-03	CHECKED BY:
SCALE: NONE	PART NO:	APPROVED BY: