



# ADDERView™ DDX-USR

KVM Extender

## DVI, VGA and DisplayPort™ video extender with USB HID over a single cable



### Features

#### Uncompressed video technology with ultra-low latency

Unlike many other digital KVM solutions, the DDX delivers every pixel of every video frame to ensure perfect digital video. Resolutions up to 1920 x 1200 at 60Hz are supported, including 1080p. Uncompressed video technology ensures ultra-low latency and a perfect "at-the-computer" experience.

#### Start with one, graduate to many

The DDX-CAM and DDX-USR modules provide an easy solution for extending a single computer and its peripherals to a user. Introduce a DDX switch between them and you have the basis of an expandable switching matrix. Just add further DDX-CAM and DDX-USR modules for each new computer and user. This superb flexibility safeguards your investment and provides a pain-free progression path. Please see the DDX30/ DDX10 datasheet for further details.

#### USB powered

The device can be powered by USB meaning there is no need to provision for an external PSU. Options for powering from an external PSU or redundant PSU are also available.

#### Optimal USB technology

Supports simple USB HID (Human Interface Device) only. Keyboards, mice, Windows supported touch screens.

#### Simple CATx cabling

DDX uses widely available SFTP cable to connect the user console (up to 50m) and computer dongles (up to 10m) to the central switch.

#### Single cable up to 50 meters

Video, USB HID only and analog audio all pass along a single CAT cable which can be up to 50 meters long. The achievable distance is dependent on the monitor resolution and the number of connection breaks for patch panels and wall plates. See table on reverse for details.

#### ZeroU™ Computer Access Module

The compact DDX-CAM computer module derives all its power from a single USB connection and takes ZeroU space in your rack. Available in DVI, VGA and display port versions to match your computer.

#### EDID management


The extender has an intelligent EDID management to allow the true characteristics of the monitor to be passed back to the computer.

#### Plug and play

The ADDERView DDX-USR extender is delivered in a zero config state so you can plug the units in and start working with them straight away. There is no need for drivers or software to be installed.

#### USB audio composite device

Bi-directional, CD quality audio (stereo channel 16 bit sampled at 48kHz) from transmitter to receiver. Line out and headphones with microphone input is supported..

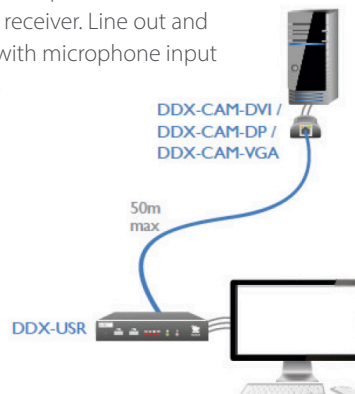

### Product In Brief

This high performance KVM extender allows you to locate your critical computing hardware in a secure and temperature controlled environment away from the user workstation, while maintaining the original user desktop experience.

- Video up to 1920 x 1200
- USB for keyboard, mouse and touchscreen
- Lossless HD video in real-time
- Microphone input, headphone output and line out
- USB-powered computer module
- Plug and play



**ADDERView DDX-UXR**

## Technical Specifications

### Hardware compatibility

- All computers with DVI, VGA or display port video, and USB.

### Video interface

- The system supports resolutions to a maximum of 1920 x 1200 @ 60Hz.
- Display port version requires source to be DisplayPort Dual-Mode (DP++) compliant.

### USB

- Support simple USB HID (Human Interface Device) only. Keyboards, mice and Windows supported touchscreens.

### Software compatibility

- All known operating systems.

### Peripheral connections (USR)

- DVI-D, USB type A x 4, 6p6c options port, 3 x 3.5mm jack sockets for headphone out, microphone in and line out.

### Physical design

- Compact case, robust metal construction.
- 170mm/6.65" (w), 31mm/1.22" (h), 120mm/4.8" (d), 0.6kg/1.3lbs.

### Power (USR unit)

- Locking 3-pin DC jack, 100-240VAC 50/60Hz, 0.7A, input to power adapter, 12VDC 18W output from power adapter.

### Power (CAM unit)

- USB powered (Max 500mA @ 5V)

### Operating/storage conditions

- Operating temperature: 0 to 40°C/32 to 104°F.
- Mean Time Between Failure (MTBF): DDX-USR: 800,000 hours; DDX-CAMXX: >1.9M hours, calculated to Telecordia standard SR-332 issue 4 March 2016. @55°C

### Important extension distance details

A minimum specification of Shielded Twisted Pair (STP) cables must be used with the DDX30, DDX10, DDX CAM and DDX USR.

### Recommended cables are STFP:

Daetwyler 7702 Flexible patch cable  
Daetwyler 7120 Bulk cable

Res (@60Hz)	Cable	Patches	Distance
1920 x 1200	SFTP	0	50m
1920 x 1200	SFTP	2	40m

### Notes:

Unshielded cables are not suitable for the DDX. Distances are achieved using single lengths of SFTP trunk/bulk cable with two 3 meter SFTP patch cables.

For each additional break/patch connection reduce distance by 5 meters.  
Patch cables must be SFTP.

## Ordering Information

### DDX-CAM-DVI:

DDX computer access module - DVI

### DDX-CAM-DP:

DDX computer access module - display port

### DDX-CAM-VGA:

DDX computer access module - VGA

### DDX-USR-XX:

DDX user station (RX unit)

XX = Mains Lead Country Code:

UK = United Kingdom

US = United States

EURO = Europe

CN = China

JPN = Japan

AUS = Australia

### Additional Accessories

**RMK8:** 19" rack mount bracket  
(two units per 1U rack slot)

**RMK10:** Wall mount bracket for DDX-USR

**RMK5V:** Vesa mounting kit

## About Adder

Adder is a leading developer and thought leader in connectivity solutions. Adder's advanced range of KVM switches, extenders and IP solutions enable the control of local, remote and global IT systems across the enterprise. The company distributes its products in more than 60 countries through a network of distributors, resellers and OEMs.

Adder has offices in China, Germany, Japan, the Netherlands, Singapore, Spain, France, Sweden, United Kingdom and United States.

**To find out more, visit: [adder.com](http://adder.com)**

#### Global Headquarters

Tel: +44 (0)1954 780044 | Fax: +44 (0)1954 780081  
Email: [sales@adder.com](mailto:sales@adder.com)

#### Americas

Tel: +1 888 932 3337 | Fax: +1 888 275 1117  
Email: [usasales@adder.com](mailto:usasales@adder.com)

#### Asia Pacific

Tel: +65 6288 5767 | Fax: +65 6284 1150  
Email: [asiasales@adder.com](mailto:asiasales@adder.com)

All brand names and trademarks are the property of their respective owner. Copyright 2021 | Adder Technology Ltd. | ADDER\_DS063\_EN\_v4\_WEB.indd

Information contained in this data sheet is up-to-date and correct as at the date of issue. As Adder Technology cannot control or anticipate the conditions under which this product may be used, each user should review the information in the specific context of planned use. Images are for illustrative purposes only.

**ADDER**<sup>®</sup>  
THE IP KVM PEOPLE

**DATA SHEET**