


Item No	Length(mm)	Tolerance(mm)	Barcode	Packing	5PCS/Packing
AK2014	1200	±30	8716065209143	0.06*100*200mm	0.06*190*300mm
AK2015	2500	±30	8716065189308	0.06*190*300mm	0.06*280*360mm
AK2016	5000	±30	8716065209150	0.06*190*300mm	0.06*280*360mm
AK2017	10000	±100	8716065209167	0.06*190*300mm	0.06*300*420mm
AK2018	15000	+200/-100	8716065209174	0.06*190*300mm	0.06*300*420mm


**NOTE:**

1. CABLE:28AWG, NON-UL, (1C+S)\*2F, OD=2.8/5.6mm, BLACK COLOR ,PVC JACKET, STRANDED COPPER
2. LENGTH: Lmm
3. CONNECTOR: RCA MALE \*4PCS.
4. MOLD: RED/WHITE MOLDING.
5. CONTACTS:
 

RCA( MALE)	1	64
RCA( MALE)	1	64
	CENTER	SHIELD
6. OPEN/SHORT TEST: 100% TEST.  
INSULATION: 5M.

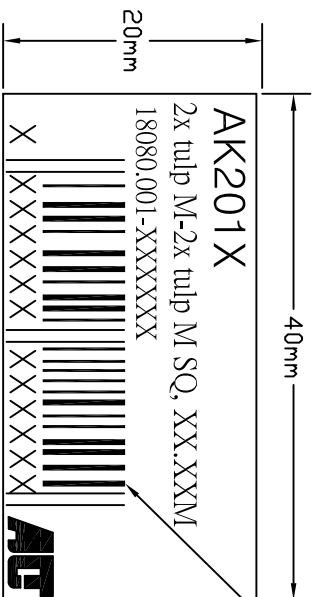

Change according to the order

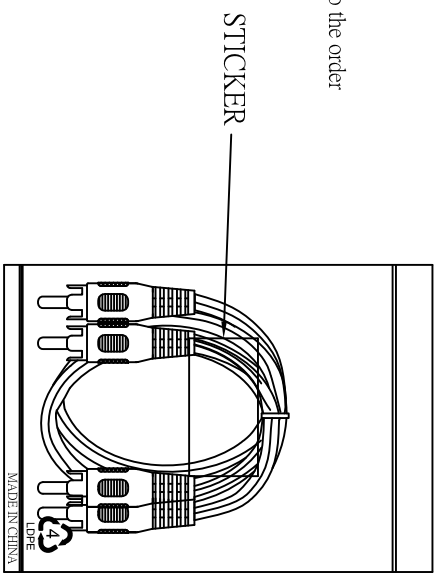

1PCS/PE BAG(0.06\*XXX\*XXX)+STICKER  
+5PCS/PE BAG(0.06\*XXX\*XXXmm)

RoHS COMPLIANT

Company	IBV	Goods Code	Draw	FC001	JACK	Date	2011.08.27
ITEM NO.	AK201X	Drawing Evidence:	Check			Date	
Goods NO.			Approval			Date	
Original NO.	K-2608018	Unit(mm)					
							<b>ATG</b>
D							20111111
C	change copper and description						K-20e
B	change copper and tolerance						20111102
VER. A	REVISE						K-20e
						Date	