


CUSTOMER'S APPROVAL: _____ DATE: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

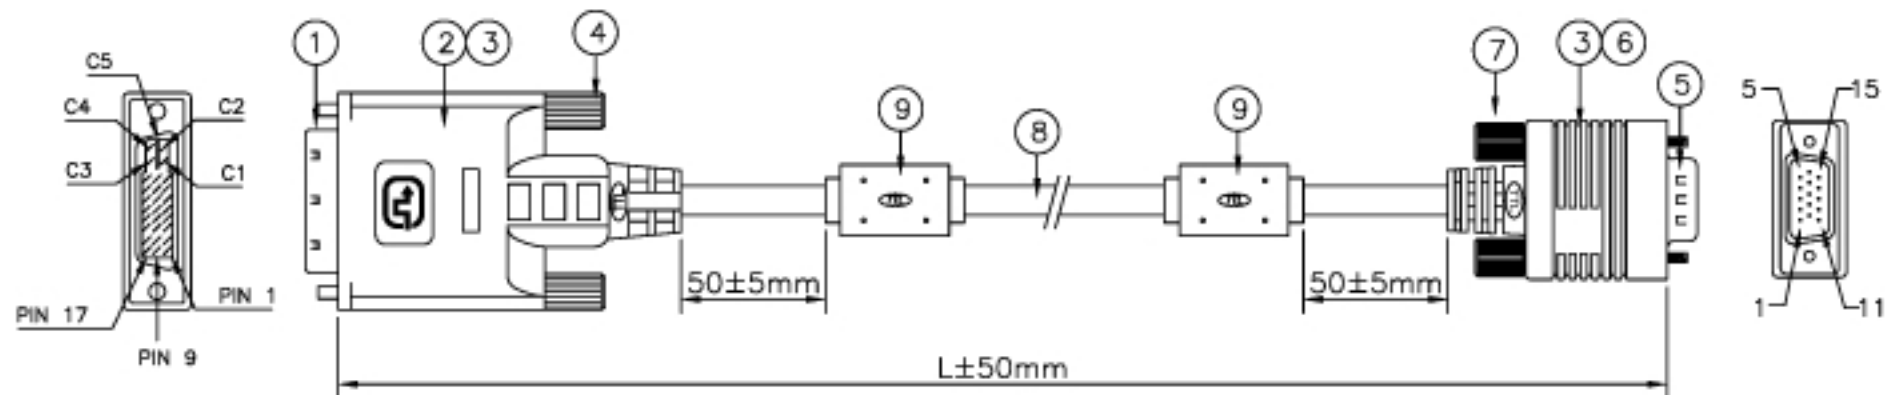

NOTE:

1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK SHIELDING DESIGN.
2. WIRE MARKING:
 E193793 RJ AWM 20276 80°C 30V VW-1
 DVI ANALOG/ANALOG

PINOUT CONFIGURATION

DVI MALE		HD15 MALE	
ANALOG RED	C1	R	1
ANALOG GREEN	C2	G	2
ANALOG BLUE	C3	B	3
HORIZONTAL SYNC	C4	WHITE	13
ANALOG GROUND	C5	R.G.B SHIELD	6,7,8
DDC CLOCK	6	BLACK	15
DDC DATA	7	GREEN	12
VERTICAL SYNC	8	RED	14
POWER +5V	14,16	YELLOW	9
GROUND	15	ORANGE	5,10
SHELL		DRAIN+BRAID	SHELL

Customer's P/N	L (mm)
AK3650	2000
AK3651	3000
AK3652	5000
AK3654	10000

UNIT:m/m

ITEM	DESCRIPTION	QTY.	UNIT
1	DVI MALE CONNECTOR	1	PCS
2	LIGHT GRAY K239 MOLDED PVC HOOD	1	PCS
3	RF-BLOK	2	PCS
4	LIGHT GRAY K239 #4/40 THUMBSCREW	2	PCS
5	HD15P MALE CONNECTOR	1	PCS
6	LIGHT GRAY K239 MOLDED PUSH UP PVC HOOD	1	PCS
7	LIGHT GRAY K239 #4/40 THUMBSCREW	2	PCS
8	UL20276 (28AWG COAX WITH 90% SPIRAL SHIELD)*3C+ (28AWG*1PAIR)+(28AWG WIRE)*4C;AL-FOIL/MY+DRAIN+85% BRAID OVERALL; LIGHT GRAY K239 PVC JACKET	SEE	DWG
9	LIGHT GRAY K239 FERRITE CORE(17.5x28.5x10)mm	2	PCS

REVISED DETAILS			REVISED BY	Customer's P/N: SEE TABLE	Revision: ORIG.	AK3650
REV.	DESCRIPTION	DATE				
				RFQ number:	Drawing #: 020752	
				Drawn by: CANDY	Scale: None	
				Checked by:	Date:	
				SALES : LILIAN		