



REV.	REVISED DESCRIPTION	DATE	CHECKED
A1		2023/03/10	

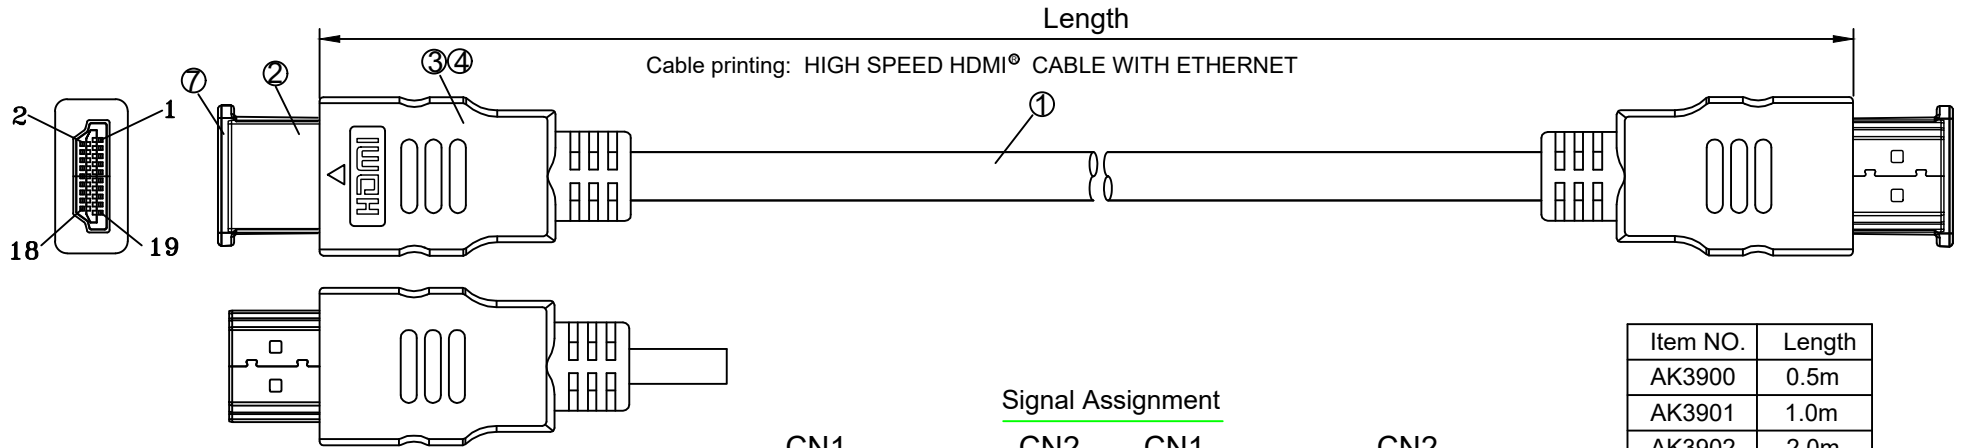


Item NO.	Length
AK3900	0.5m
AK3901	1.0m
AK3902	2.0m
AK3903	3.0m
AK3904	5.0m

#### Signal Assignment

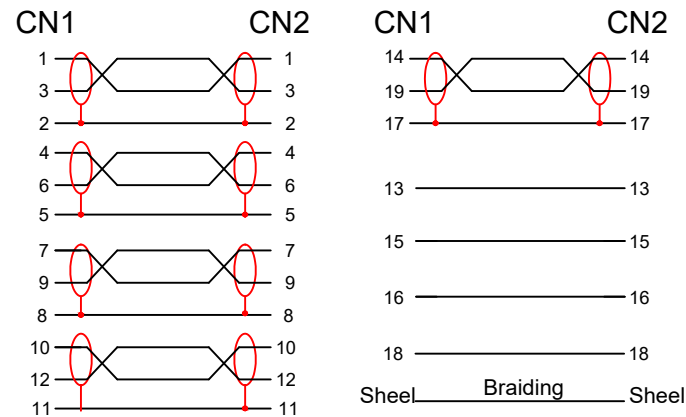


#### Cable Spec.

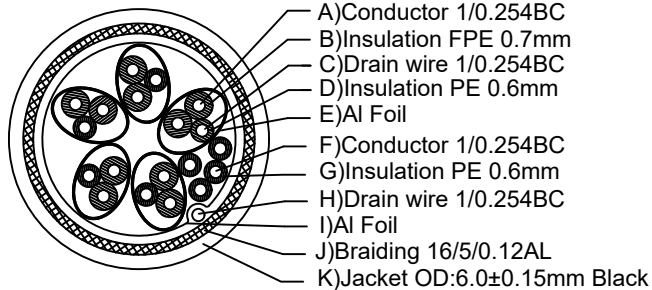

#### Remark:




1. 100% Open/Short Test
2. Conductive Resistance: 15ohms MAX
3. Insulation Resistance: 5M ohm MIN.
4. HI-POT: DC 300V/10MS.
5. The product is Reach/RoHS 2.0 compliant.
6. Support 4K\*2K@60Hz
7. Maximum bandwidth 18Gbps

⑤		HDMI Protective Cap, PE	2PCS	
④	External Mold	Outer Mould 45P PVC, Black	2PCS	
③	Internal Mold	Inner Mould PE	2PCS	
②	Connector	HDMI A PLUG PIN, Gold-Plated	2PCS	
①	Cable	30AWG 2.0V (19+1BC) 80ALB HDMI Cable OD:6.0mm (0.254BC+FPE)*1P+D+AL] *5C + (0.254BC+HDPE)*4C + AL + D + 80ALB PVCOD6.0mm		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A1
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		PAGE NO	1/1
		DATE	2023/03/10
APPROVAL		CHECKED	
		DRAWN	

REV.	REVISED DESCRIPTION	DATE	CHECKED
A1		2023/03/10	

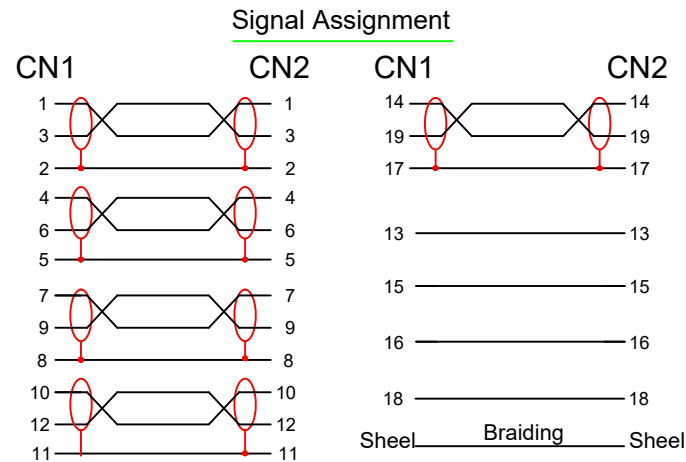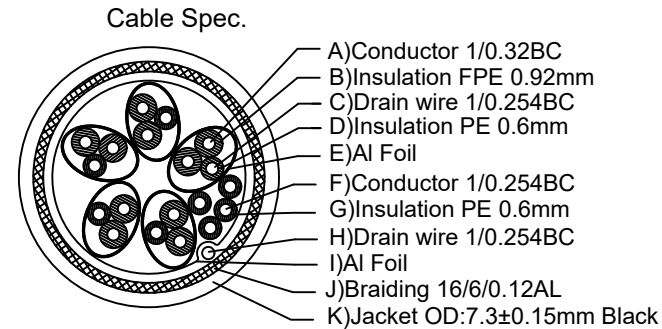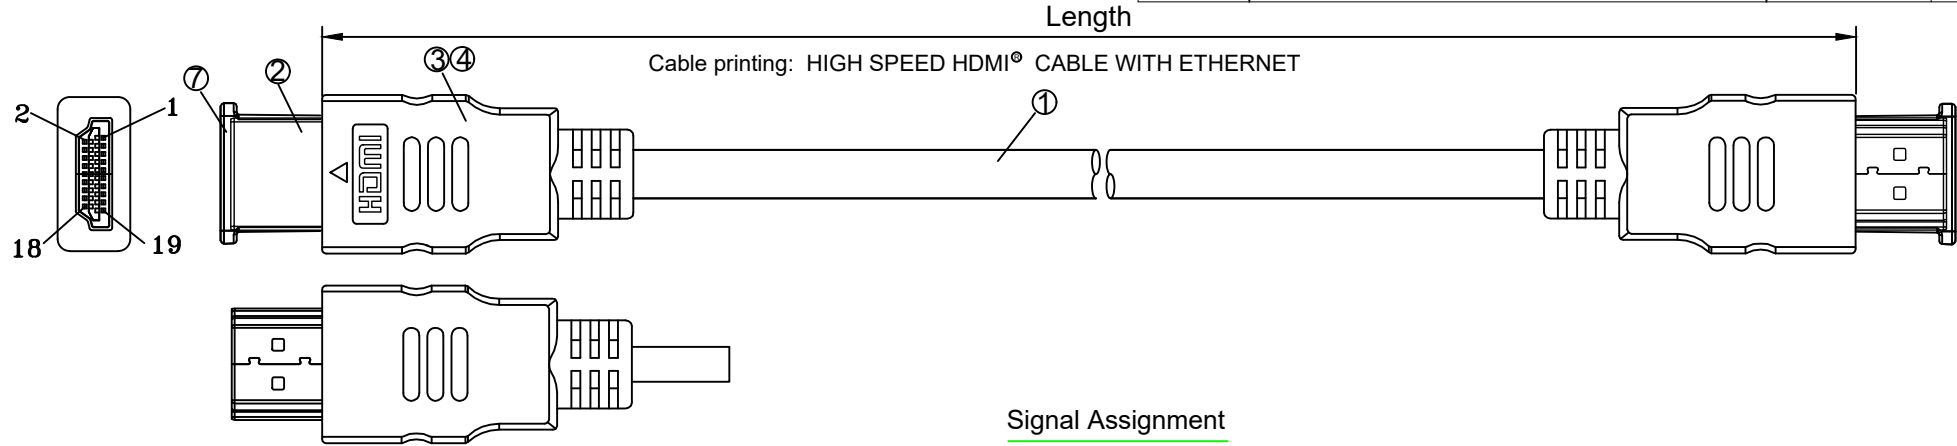


Item NO.	Length
AK3905	7.0m

Remark:

- 100% Open/Short Test
- Conductive Resistance: 15ohms MAX
- Insulation Resistance: 5M ohm MIN.
- HI-POT: DC 300V/10MS.
- The product is Reach/RoHS 2.0 compliant.
- Support 4K\*2K@60Hz
- Maximum bandwidth 18Gbps

⑤		HDMI Protective Cap, PE	2PCS	
④	External Mold	Outer Mould 45P PVC, Black	2PCS	
③	Internal Mold	Inner Mould PE	2PCS	
②	Connector	HDMI A PLUG PIN, Gold-Plated	2PCS	
①	Cable	28+30AWG 2.0V (19+1BC) 96ALB HDMI Cable OD: 7.3mm (0.32BC+FPE)*1P+D+AL] *5C + (0.254BC+HDPE)*4C + AL + D + 96ALB PVCOD7.3mm		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A1
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		PAGE NO	1/1
		DATE	2023/03/10
APPROVAL		CHECKED	
		DRAWN	