

Conn.1 Mini Display Port


Tabel:

Part No	Length
AK3963	1000±30
AK3964	1500±40
AK3965	2000±50
AK3966	3000±50

Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm Max
3. Insulation Resistance: 10M ohm Min
4. Hi-Pot: 250V DC/10ms

Conn.2 Display Port M

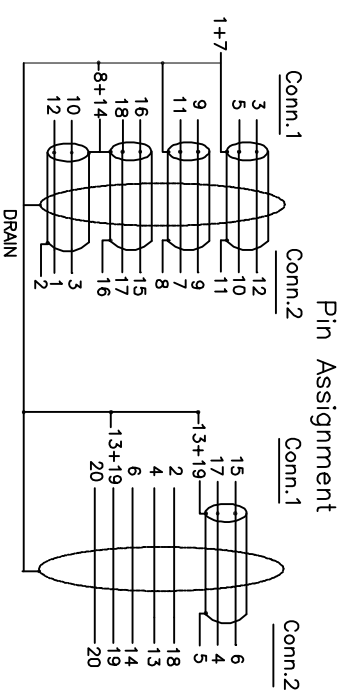

NO.	DESCRIPTION	Q'TY	UNIT
⑥	S.R. Molding 45P PVC, color: White	15	9
⑤	Plastic Hood for DisplayPort Male, Material: ABS, Color: White	1	set
④	Plastic Hood for Mini DP, Material: ABS, Color: White	1	set
③	Display Port Male Pin Gold,Insulation Black,Shell Nickel Plated	1	Pcs
②	Mini Display Port Male, Insulation: White, Material: LCP, Pin Gold Plated , Shell Nickel Plated	1	set
①	Display Port Cable UL20276 [32AWG(7/0.08TC)*1P+D.W+AL +Mylar]*5+32AWG(7/0.08TC)*5C+AL/MY+D.W+BD+Jacket PVC Color: White OD:4.8±0.2mm	L	m

REV.	TOLERANCE INCHES M/M	DESCRIPTION	DATE
.X	.015	AE TITLE: Mini Display Port to Display Port CUSTOMER NO.: AM09	
.XX	.010		
.XXX	.005		
DRAWN BY: Henry		CUSTOMER NO.:	
CHECK BY:		SCALE: NONE	DRAWING NO.:
APPD BY:		UNIT: MM	REV. A
		DATE: 10.06.04	1/1