
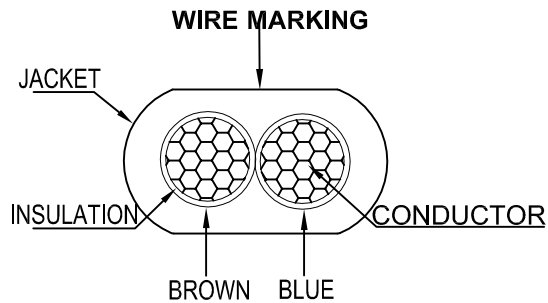


ROHS COMPLIANT

A/0

DATE	REV	DESCRIPTION	BY	CHECK
	A/0			

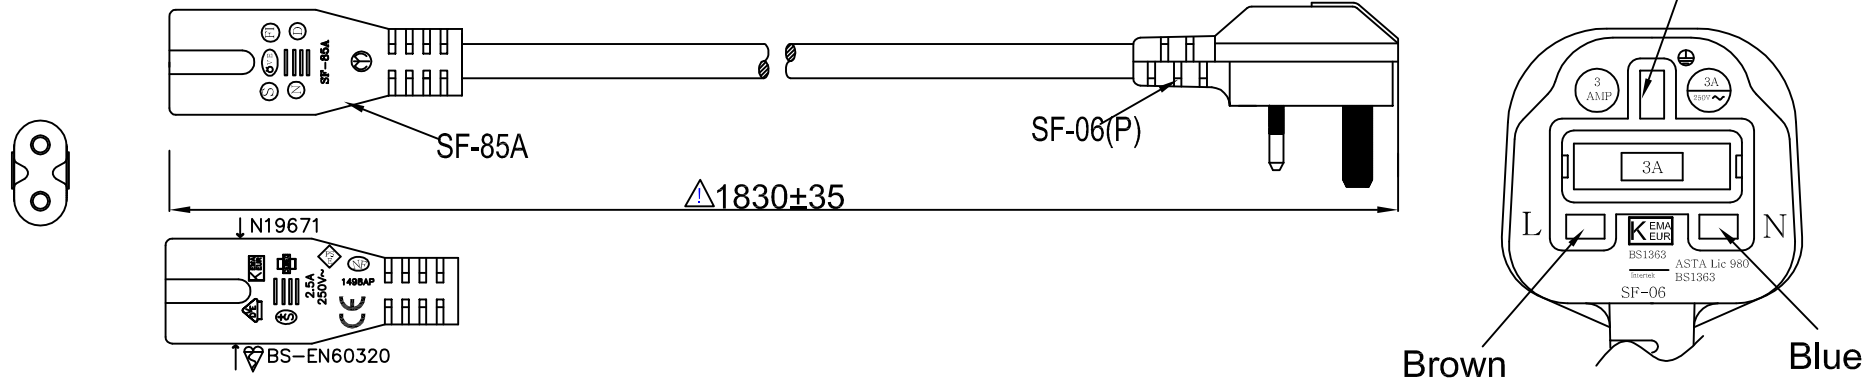

WIRE MARKING: + S + S + S KEMA-KEUR CEBC 972 <VDE> NF-USE 1345							
(HOLLOW) IEMMEQU H03VVH2-F 2X0.75MM ² V-75 300/300V LIGHT DUTY NSW17436							
Conductor		Insulation			Jacket		Overall diameter
mm ²	Resistance maximum (≤)	Min.Thick	Diameter	Length of Lay	Min.Thick	AVG.Ghick	
0.75 (24/0.190)	at20°C,26.0ohms/km	0.35mm	2.2±0.1mm	/	0.44mm	0.6mm	3.4*5.6±0.1mm
(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)							

NOTES:

- 100% OPEN & SHORT TESTING .
- VOLTAGE RATING:AC ≥2000V/S ≥0.5MA
- PLUG(SF-06(P)) RATED POWER:250V 3A
- PLUG(SF-85A) RATED POWER:250V 2.5A
- WIRE: H03VVH2-F 2*0.75 RATED VOLTAGE:300/300V
- COLOR:BLACK

PAGE	1/2					
Unless specified on the drawing, tolerances are per the follows: X ± 1 .XX ± 0.5 .XX ± 0.1		DESCRIPTION	H03VVH2-F 2X0.75MM ² SF-06P+SF-85A			
3RD		CUSTOMER NAME		CUSTOMER NO.		
		CUSTOMER PART NO.	AK5070	DRAW	DHY	DATE 2011/09/13
		SCALE		CHECK	wuxiao	DATE 2011/09/13
		UNIT	MM	APPROVAL		DATE
		PATH NAME	//D/			