


MOLDING:
SF-04
SF-87

DATE	REV.	REVISION	DRAFTING	CHECKED
2021/05/21	A/0	Initial	Bob.Chen	

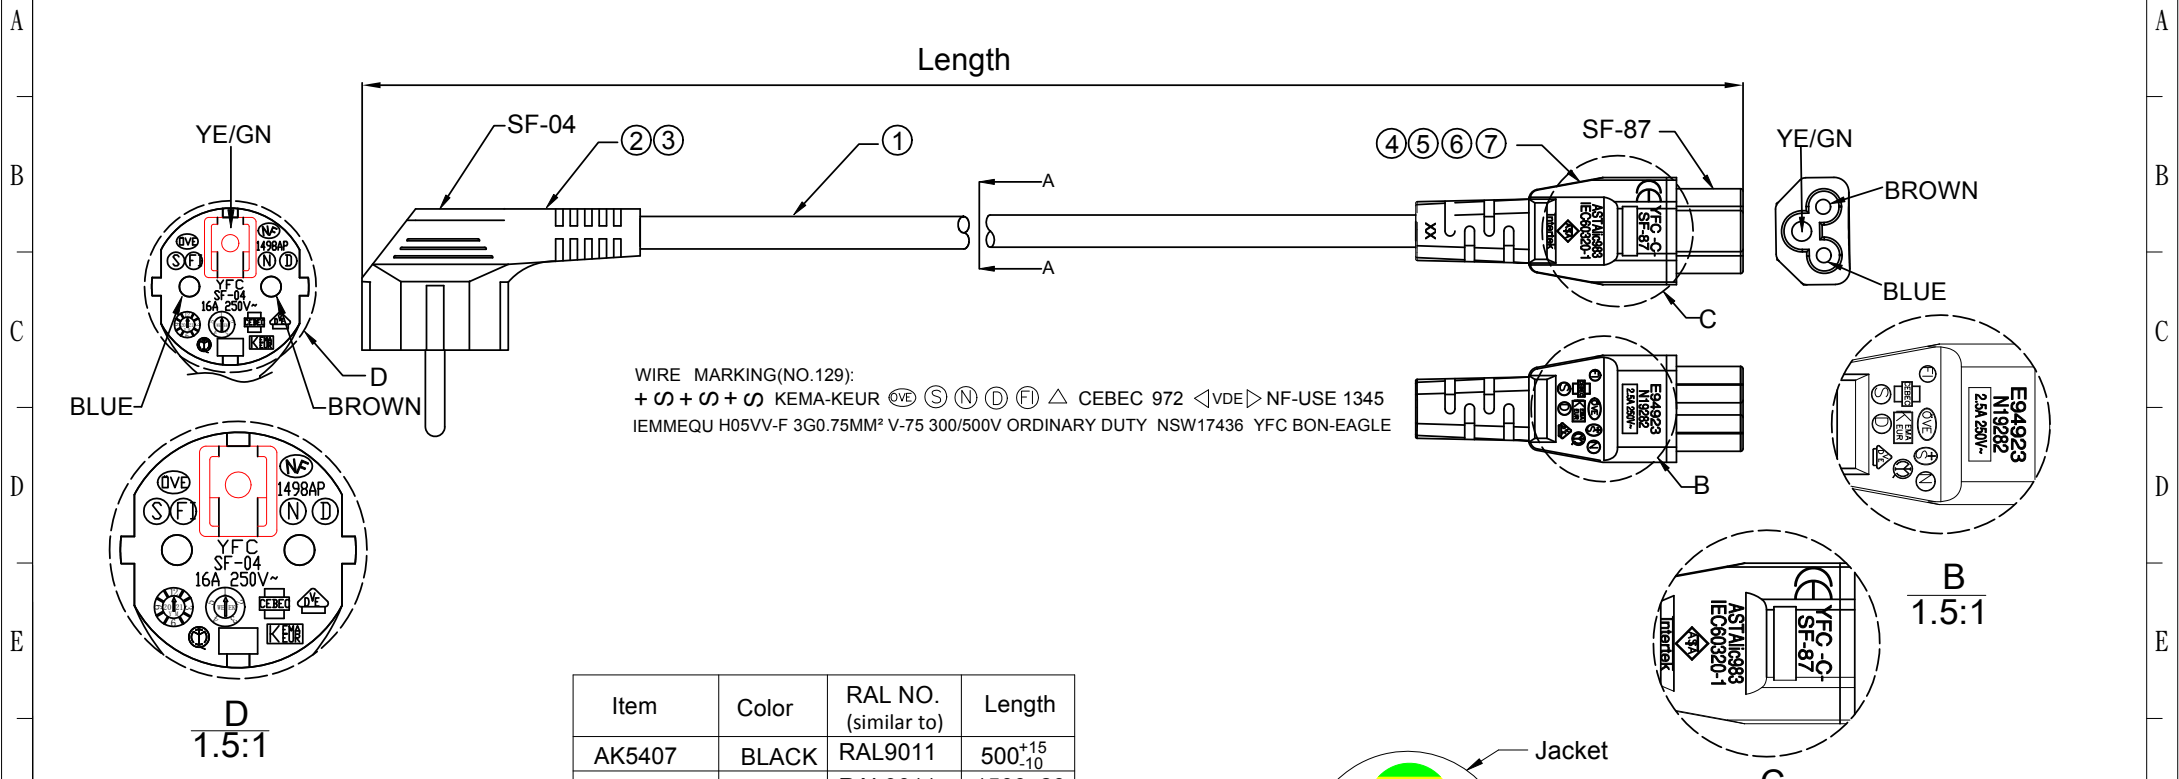

Item	Color	RAL NO. (similar to)	Length
AK5407	BLACK	RAL9011	500 ⁺¹⁵ ₋₁₀
AK5408	BLACK	RAL9011	1500±20
AK5144	BLACK	RAL9011	2000±20
AK5162	BLACK	RAL9011	1000±20
AK5163	BLACK	RAL9011	5000±30
AK5188	BLACK	RAL9011	7000±40
AK5189	BLACK	RAL9011	10000±50
AK5024	BLACK	RAL9011	3000±30

Polarity and Conduction and Penetration Test	
Dielectric Voltage Withstand Test : 2000V / 1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor Resistance	≤ 26.0Ω/1000m
Voltage Rating	AC 300V/500V

PINOUT		
SF-04	WIRE	SF-87
E	YE/GN	E
L	BROWN	L
N	BLUE	N

⑦	Molding	40P PVC BK	A/R
⑥	Housing	IEC C5 female insert (SF87) inner frame black	1PC
⑤	Terminal	C5 vase type female end, 20-16AWG line phosphor copper color	2PCS
④	Terminal	3.8 Vase type single riveted female end, with 18-22AWG	1PC
③	Molding	50P PVC BK	A/R
②	Terminal	European standard,black french connector SF-04.	1PC
①	CABLE	H05VV-F 3GX0.75mm² BK PVC	A/R
No.	TITLE	DESCRIPTION	Q'TY

Unless specified on the drawing, tolerances are per the follows:
X. ±0.20 X° ±3
.X ±0.10 .X° ±0.3
.XX ±0.05



DRAW. NO	YFAC-S210106	TITLE	H05VV F0.75mm²*3C SF-04 TO SF-87 BK CABLE ASS'Y		
CUSTOMER	ACT	DRAW	Bob.Chen	DATE	2021.05.21
CUST' R P/N	--	CHECK		DATE	
SCALE	NONE	APPROVED		SHEET	1 of 1
UNIT	mm				

Cable Spec NO.	--	Part Number	--	Note	<input type="checkbox"/> RoHS2.0 <input type="checkbox"/> Reach <input type="checkbox"/> GP <input type="checkbox"/> HF <input type="checkbox"/> Other
----------------	----	-------------	----	------	--