




AK5508

PC3608

CABLE REQUIREMENTS:

Colour: WHITE (RAL 9010)
Type: 3 Core 1.00mm² H05VV-F /
 3 Core 17 AWG SJT
 (Universal Approved - ENEC, cUL, SAA)
Conductor Colour Codes:
 Earth (Green & Yellow) 
 Neutral (Blue) 
 Live (Brown) 


Complete Powerlead Rated: 10A/250V

PLUG / END A REQUIREMENTS:

Type: SG03DC
Colour: BLACK
Rating: 10A
Reference: C14 Dual Locking Connector
 (ENEC, cUL, SAA Approved)

CONNECTOR / END B REQUIREMENTS:

Type: SG597S
Colour: BLACK
Rating: 10A
Reference: C13 IEC Lock+ Slimline Connector
 (ENEC, cUL, SAA Approved)

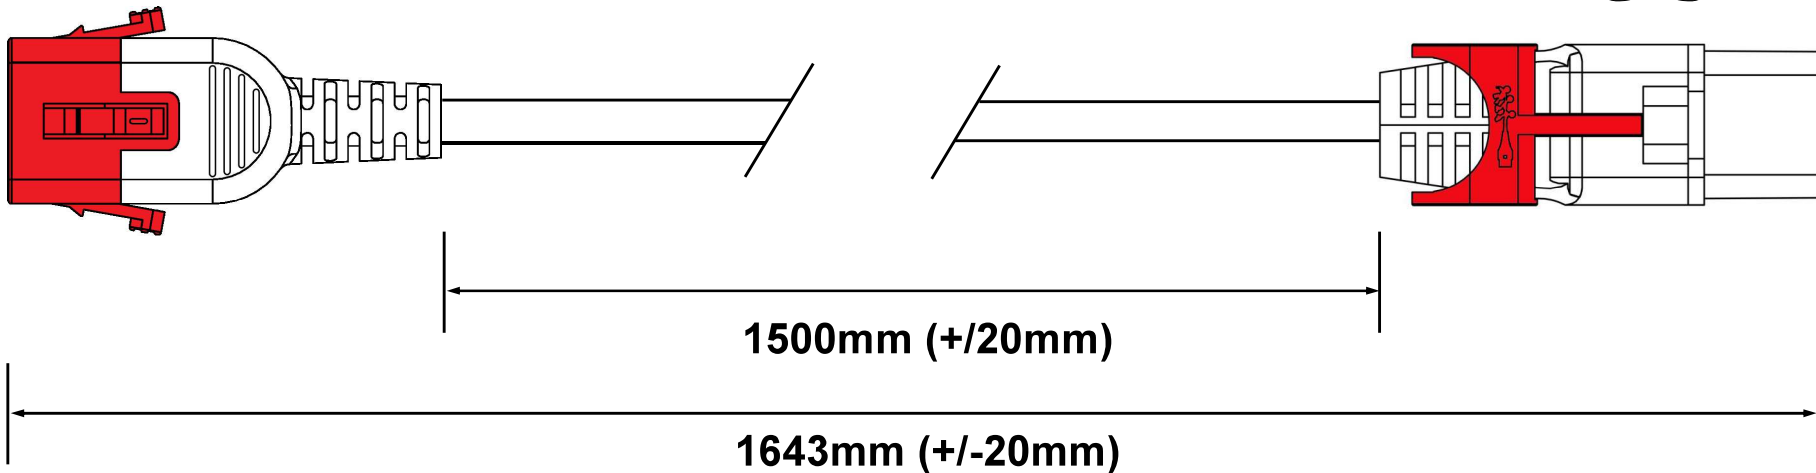

EXTRA REQUIREMENTS:

PACKAGING OUTERTBC
 PIN PROTECTING COVERNO
 WIRING INSTRUCTIONSNO
 PRE-SHIPMENT INSPECTION REQUIRED....NO

COMMENTS:

CHANGE MANAGEMENT:

HANKING

LOOSE

TERMINATIONS / FURTHER COMMENTS: