


© MPE-GARRY


Break away pinheader right angled, with 0,64 mm square pins in 2,54 mm pitch. Any pinlength available on request.

Single row pinheader.

Pitch (mm)	2,54
Mating contact size	? 0,64
No of contacts	2
Polarising	No
Locking	No
Material contact	Copper alloy
Plating contact	Selective Au
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	150 V <sub>RMS</sub> / V <sub>DC</sub>
Withstand voltage	500 V <sub>RMS</sub> for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard
A (Length)	10,80
B (Mating)	6,90
C (PCB side)	3,30
W	3,90

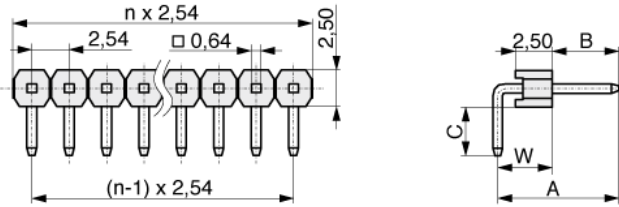

Footprint:



Date: 18.04.2011

Order code: 088-1-002-0-S-XS0-1080



MPE Garry GmbH  
Schäfflerstraße 13  
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0  
Fax: +49 (0) 83 62 / 91 56-500  
Email: [vk@mpe-connector.de](mailto:vk@mpe-connector.de)

Internet: [http://www.mpe-connector.de/index.php?lang=en&menu=4&s\\_product=088-1-002-0-S-XS0-1080](http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=088-1-002-0-S-XS0-1080)