


FLACHBANDKABEL STECKVERBINDER

IC – Sockelverbinder – 4- bis 40-polig

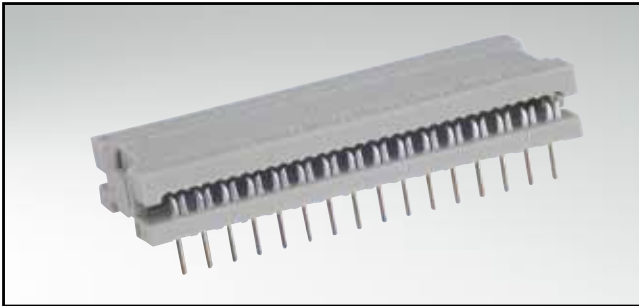


RoHS compliant


BESCHREIBUNG

- Schneidklemmtechnik
- Anschlussraster 2,54 mm
- Kontaktoberfläche vergoldet oder verzinkt

PRODUKTZEICHNUNG

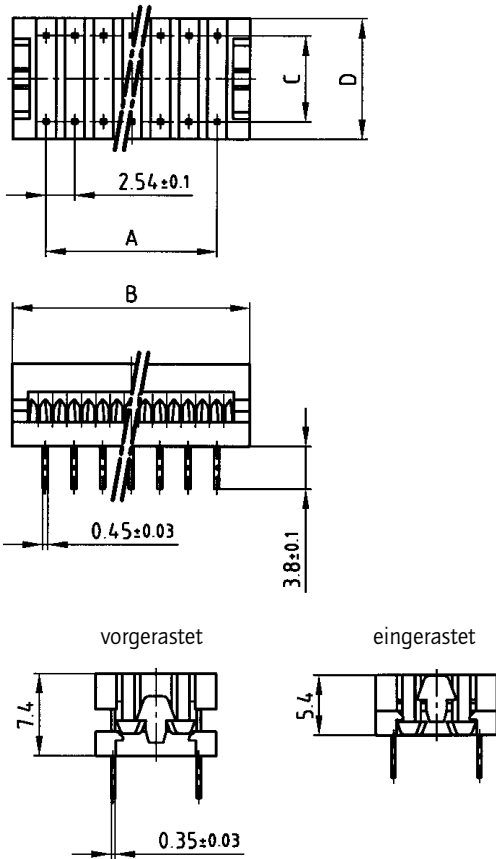

Leiterplattenbohrbild



Polzahl	A ±0.1	B ±0.2	C ±0.1	D -0.1
4	2,54	8,41	7,62	10,7
6	2x2,54=5,08	10,95	7,62	10,7
8	3x2,54=7,62	13,49	7,62	10,7
10	4x2,54=10,16	16,03	7,62	10,7
12	5x2,54=12,70	18,57	7,62	10,7
14	6x2,54=15,24	21,11	7,62	10,7
16	7x2,54=17,78	23,56	7,62	10,7
18	8x2,54=20,32	26,19	7,62	10,7
20	9x2,54=22,86	28,73	7,62	10,7
22	10x2,54=25,40	31,35	10,16	13,2
24	11x2,54=27,94	33,60	15,24	18,3
28	13x2,54=33,02	38,97	15,24	18,3
32	15x2,54=38,10	44,05	15,24	18,3
36	17x2,54=43,18	49,13	15,24	18,3
40	19x2,54=48,26	53,90	15,24	18,3

BESTELLDATEN

(Dim. = mm)

Polzahl	vergoldet	verzinkt
4	220 A 10019 X	220 F 10019 X
6	220 A 10029 X	220 F 10029 X
8	220 A 10039 X	220 F 10039 X
10	220 A 10049 X	220 F 10049 X
12	220 A 10059 X	220 F 10059 X
14	220 A 10069 X	220 F 10069 X
16	220 A 10079 X	220 F 10079 X
18	220 A 10089 X	220 F 10089 X

Polzahl	vergoldet	verzinkt
20	220 A 10099 X	220 F 10099 X
22	220 A 10109 X	220 F 10109 X
24	220 A 10119 X	220 F 10119 X
28	220 A 10129 X	220 F 10129 X
32	220 A 10139 X	220 F 10139 X
36	220 A 10149 X	220 F 10149 X
40	220 A 10159 X	220 F 10159 X