
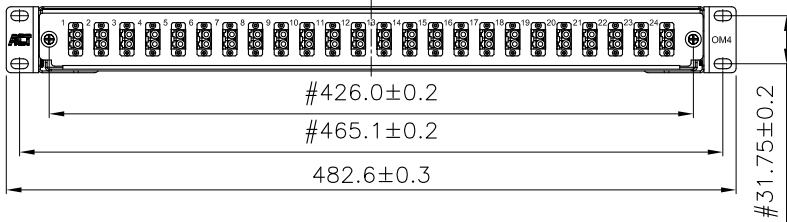


SCALE 1/10

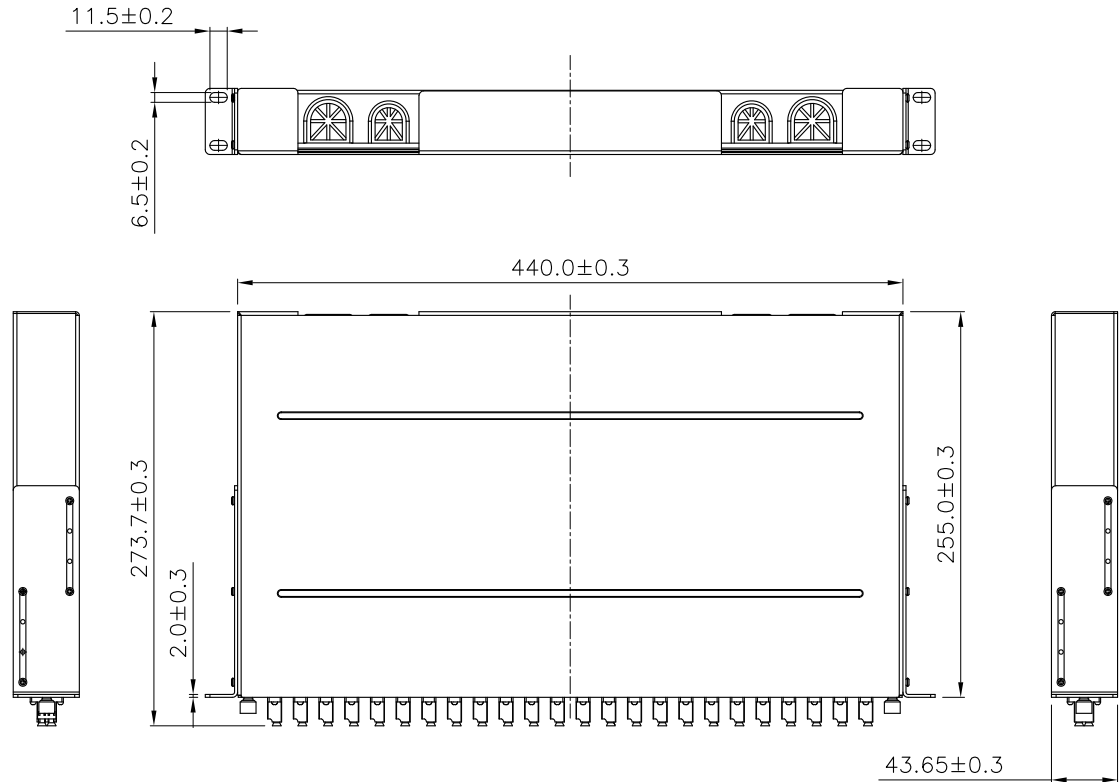

Specification :

Material :

- 1.Panel material : SPCC, 1.2mm thickness, black color.
- 2.Adaptor : 24 pieces loaded.
  - 2-1.Housing : Polycarbonate, UL 94V-0, erika violet color.
  - 2-2.Adaptor Sleeve: Zirconia sleeve.
  - 2-3.Holder : Polycarbonate, UL 94V-0, erika violet color.
  - 2-4.Dust Cover : PP, white color.
- 3.Splice cassette : 2 pieces.
- 4.fiber management spool : 2 sets.

Performance :

- a.Height : 1U(43.65mm) Width : 19"(482.6mm) Depth : 10"(255.0mm)
- b.Shelf mounting adjustment range : 0~245.0mm
- c.Net weight : 4.5kg
- d.LC to LC duplex type.
- e.Durability : 500 cycles.
- f.Tensile strength : 10 kgf.
- g.Insertion loss : <0.3 dB(multimode).
- h.Operating temperature : -20°C to +70°C.
- i.Storage temperature: -40°C to +80°C.

**#: Matching DIM. *#: Important DIM. Others General DIM.	DRAWING	03.NOV.2020	DANIEL		
	CHECK	03.NOV.2020	DAY		
	APPROVAL	03.NOV.2020	FRANK		
GENERAL TOLERANCE OF DIMENSIONS	DATE	NAME	ITEM NO.: FA2040		
X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	SCALE	1/5 (A4)	UNIT	mm	DES.:Fiber panel 24 x duplex LC multimode OM4
	DRAWING NO.		Fiber panel 24 x duplex LC multimode OM4(S01)		
	DRAWING CLASSIFICATION		S	SHEET 1 OF 1	