


Pitch (mm)	2,00
Mating contact size	? 0,50
No of contacts	10
Polarising	No
Locking	No
Material contact	Copper alloy
Plating contact	Selective Au
Material insulator	High temp. thermoplast UL94V-0
Rated current	1,5 A
Rated voltage	150 V <sub>RMS</sub> / V <sub>DC</sub>
Withstand voltage	500 V <sub>RMS</sub> for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard
A (Length)	8,35
B (Mating)	4,00
C (PCB side)	2,85


© MPE-GARRY

Vertical pinheader with 0,50 mm square pins and 2,00 mm pitch. Many different pin length and plating options. Standard and low profile versions available.

Dual row

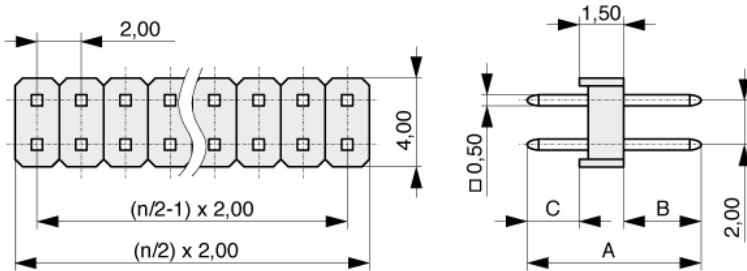

Footprint:

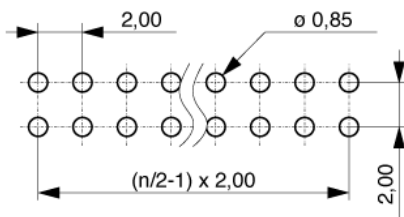

Date: 18.04.2011

Order code: 150-3-010-0-S-XS0-0835



MPE Garry GmbH  
Schäfflerstraße 13  
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0  
Fax: +49 (0) 83 62 / 91 56-500  
Email: [vk@mpe-connector.de](mailto:vk@mpe-connector.de)

Internet: [http://www.mpe-connector.de/index.php?lang=en&menu=4&s\\_product=150-3-010-0-S-XS0-0835](http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=150-3-010-0-S-XS0-0835)