


FEMALE HEADER
PITCH 2.54x2.54mm
ACC. TO EN 60603-13

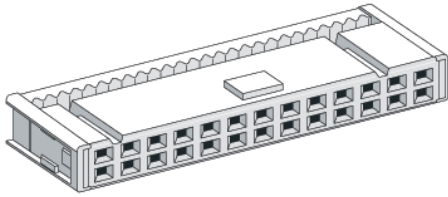


Contacts:	Copper alloy
Finish:	RL1-RL3: gold plated
	RL4: tin plated
Insulator:	PBT 20% GF
Withstanding voltage:	1000V DC or AC peak
Current rating:	1.0A
Contact resistance:	20mOhm
Insulation resistance:	5000MOhm at 100V
	Life:
	RL2: 250 mating cycles
	RL3: 50 mating cycles
	RL4: 50 mating cycles

Accessories:

Strain relief: SPFHxx-SR

6, 8, and 60pol. connectors upon request

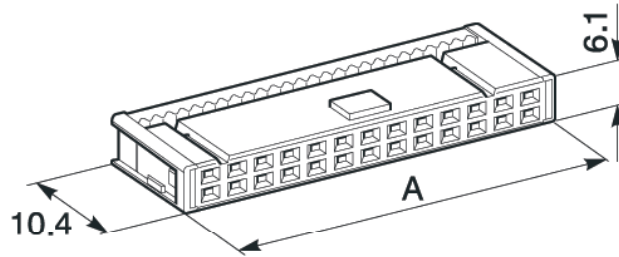

No. of Contacts	10	14	16	20	26	34	40	50
A [mm]	17.3	22.4	24.9	30.0	37.6	47.8	55.4	68.1

SPFHxx-3000

not used	0 (Standard)
Guiding lug:	0 = with (Standard)
	1 = without
not used	0 (Standard)
Requirement level:	1 = RL1 = gold plated, 500 mating cycles
	2 = RL2 = gold plated, 250 mating cycles
	3 = RL3 = gold plated, 50 mating cycles
	4 = RL4 = tin plated, 50 mating cycles
No. of contacts	

