



DATE	REV	DESCRIPTION	BY	CHKD

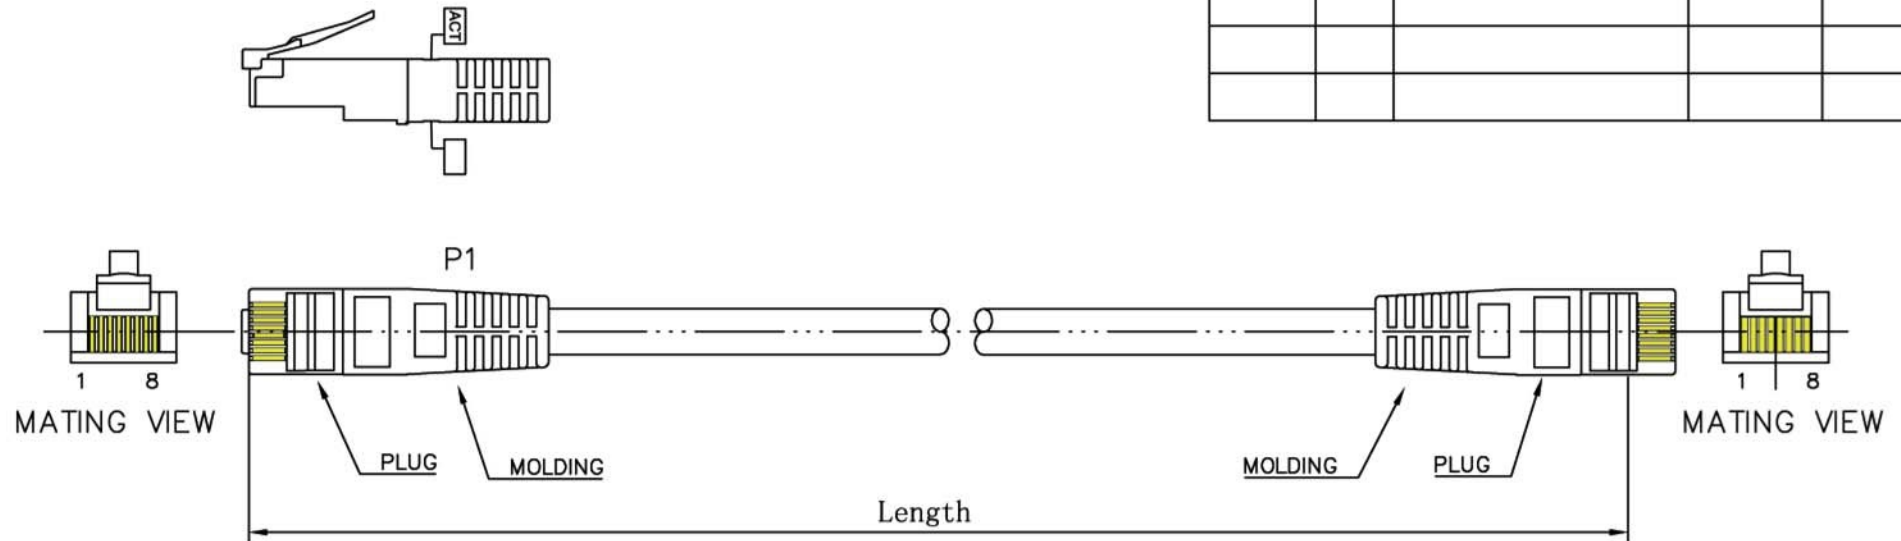

Marking: <LP443> ACT UTP CATEGORY 6 PATCH CABLE 4×2×AWG#24 ISO/IEC 11801 & EN 50288 & TIA/EIA 568B.2-1 ETL 3P VERIFIED FOR 10GBASE-T ETHERNET TYPE CM(UL) C(UL) CMH E164469-F3 LEADFREE EN71 15000.001

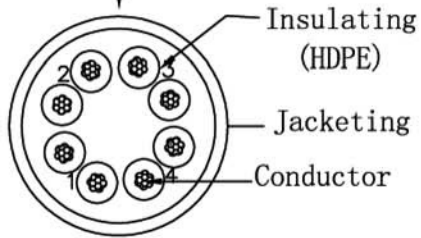


orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2
1	1	WHT/ORG	3
	2	ORG	6
2	3	WHT/GRN	1
	6	GRN	2
3	4	BLU	7
	5	WHT/BLU	8
4	7	WHT/BRN	4
	8	BRN	5

Conductor	Bare Copper 24AWG 7/0.196 ± 0.015mm
Insulation	Thickness: MIN at any point: 0.15mm MAX AVG: 0.25mm Diameter: 1.04 ± 0.06mm
Jacketing PVC	Thickness: MIN at any point: 0.42mm MAX AVG: 0.48mm Diameter: 5.9 ± 0.15mm

WIRE	CAT.6 UTP STR 24AWG
WIRE COLOR	BLACK RAL9011
MOLDING COLOR	Red

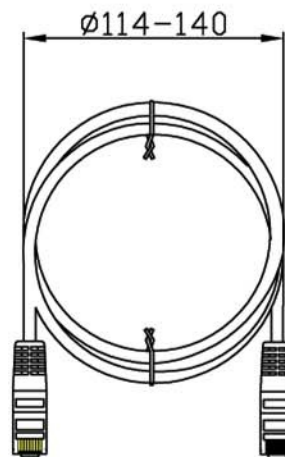

Unless specified on the drawing, tolerances are per the follows:

.X	± 1
.XX	± 0.2
.XX	± 0.05

3RD



ACT

DRAW.NO	YUS-06	ITEM	IB81XX	
DEPARTMENT		DRAW	DATE	
SCALE		CHECKER	APPROVAL	
UNIT	MM	SHEET	1 OF 1	