



Pitch (mm)	3,00
Mating contact size	? 0,64
No of contacts	4
Positioning peg	with
Polarising	Yes
Locking	Positive lock
Material contact	Copper alloy
Plating contact	Sn
Material insulator	High temp. thermoplast UL94V-0
Rated current	5,0 A
Rated voltage	250 V <sub>RMS</sub> / V <sub>DC</sub>
Withstand voltage	1500 V <sub>RMS</sub> for 1 minute
Operating temperature	-25°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard
A	9,70
B	3,00

Compatible with industries standard

Double row, parallel mount.

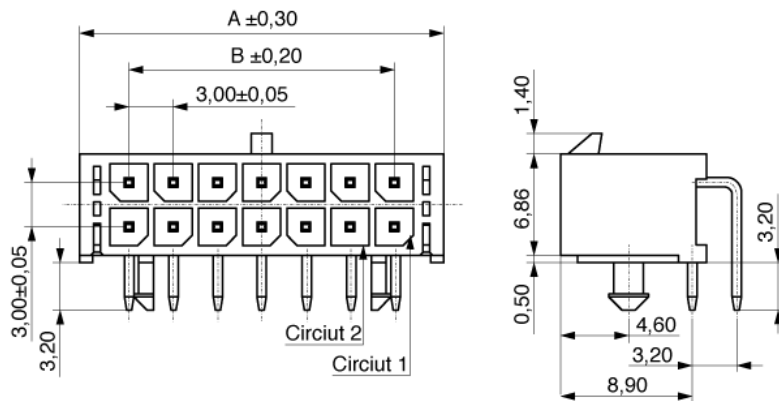

Footprint:

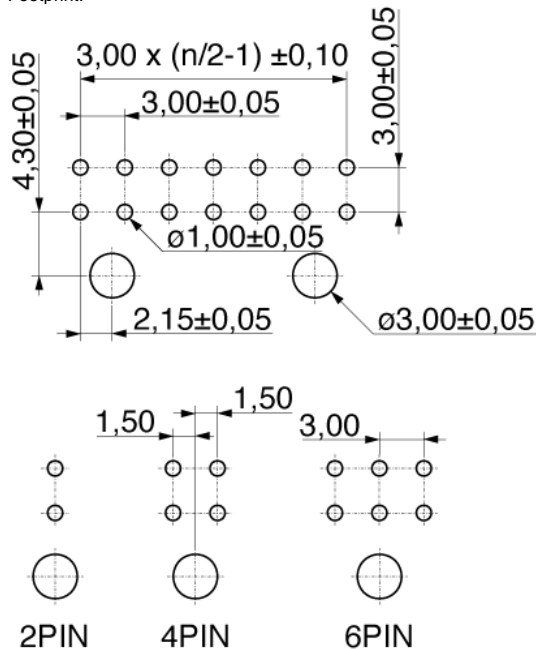

Date: 18.04.2011

Order code: 435-4-004-1-T-KS0



MPE Garry GmbH  
Schäfflerstraße 13  
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0  
Fax: +49 (0) 83 62 / 91 56-500  
Email: [vk@mpe-connector.de](mailto:vk@mpe-connector.de)