



Pitch (mm)	3,00
Mating contact size	? 0,64
No of contacts	4
Positioning peg	without
Polarising	Yes
Locking	Positive lock
Material contact	Copper alloy
Plating contact	Sn
Material insulator	High temp. thermoplast UL94V-0
Rated current	5,0 A
Rated voltage	250 V _{RMS} / V _{DC}
Withstand voltage	1500 V _{RMS} for 1 minute
Operating temperature	-25°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard
A	9,70
B	3,00

Compatible with industries standard

Right angled with solderable fitting pad.

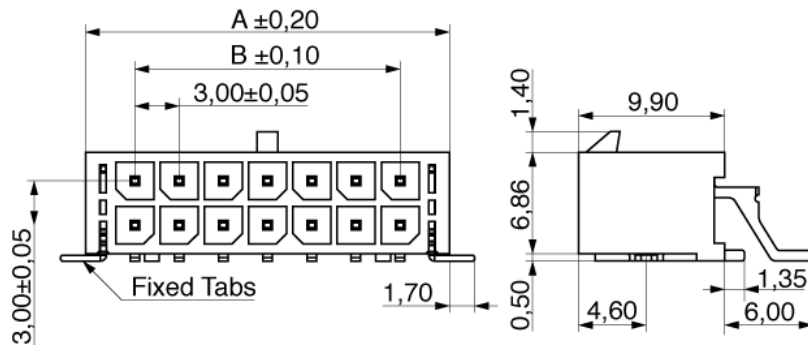

Footprint:

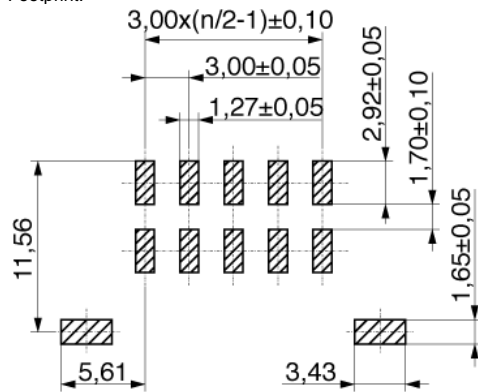

Date: 18.04.2011

Order code: 437-4-004-0-T-KS0



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: yk@mpe-connector.de

Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=437-4-004-0-T-KS0