


Pitch (mm)	
Mating pin size (range)	3,00
Cable termination	U 0,68, ? 0,64
No of contacts	Crimp
Polarising	4
Locking	Yes
Material contact	Positive lock
Material insulator	Copper alloy
Rated current	Thermoplast UL94V-0
Rated voltage	5,0 A
Withstand voltage	250 V <sub>RMS</sub> / V <sub>Dc</sub>
Operating temperature	1500 V <sub>RMS</sub> for 1 minute
Packaging	-25°C to +85°C
A	Standard
B	0,35
	3,00

Crimphousings with a 3,00 mm pitch with polarisation feature. Compatible with industries standard.

**Contacts are not included.**

Double row version.

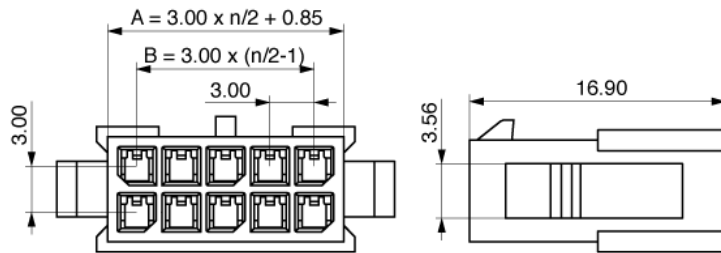

Date: 18.04.2011

**Order code: 434-2-004-X-KS0**



MPE Garry GmbH  
Schäfflerstraße 13  
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0  
Fax: +49 (0) 83 62 / 91 56-500  
Email: [vk@mpe-connector.de](mailto:vk@mpe-connector.de)

Internet: [http://www.mpe-connector.de/index.php?lang=en&menu=4&s\\_product=434-2-004-X-KS0](http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=434-2-004-X-KS0)