

Features and Benefits


The Molex CAA-00418 is an outside plant Gel-Filled Category 6A 4 Pair U/FTP cable. A HDPE compound insulates the cores while a PE (UV) sheath provides protection against moisture and UV. An additional nylon outer jacket provides protection against abrasion and termites. The rugged construction of this cable makes it ideal for outdoor/underground installations. Molex uses a Gel Foam which is easier to clean than current water resistant gels.

- Category 6A compliant
- PE (UV) and nylon sheathed for greater protection
- UV resistant
- Suitable for outdoor/underground installations
- Water Resistant Gel

Technical Information

Mechanical Characteristics

Conductor Size: Solid 0.560 Solid Bare Copper
 Primary Insulation: HDPE
 Nominal O.D.: 1.330 ± 0.05 mm
 Sheath Type: Inner: LDPE
 Outer: Nylon
 Nominal O.D.: Overall: 8.3 ± 1.0 mm
 Inner: 0.55 ± 0.05 mm
 Outer: 0.35 ± 0.1 mm
 Operating Temperature: -20° to 75°C
 NVP: 65%
 Maximum Pulling force: 50N/square mm

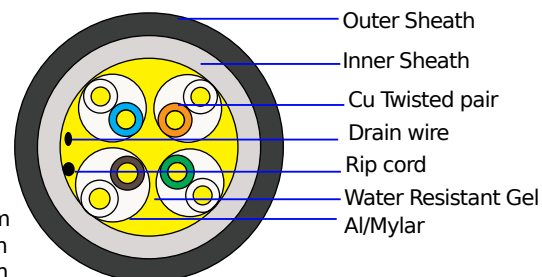

Commercial Standards

Cat 6A ANSI/TIA/EIA-568-C.2, ISO/IEC 11801, UL444

Electrical Characteristics

FREQ (MHz)	RL (dB)	ATT (dB/100m)	NEXT (dB)	PS-NEXT (dB)	ELFEXT (dB)	PS-ELFEXT (dB)	PD (ns/100m)	Upper Characteristic impedance Zu(Ω)	Lower Characteristic impedance Zl(Ω)
1	20.0	-	74.3	72.3	67.8	64.8	570.0	-	-
4	23.0	3.8	65.3	63.3	55.8	52.8	552.0	115.2	86.8
8	24.5	5.3	60.8	58.8	49.7	46.7	547.0	112.6	88.8
10	25.0	5.9	59.3	57.3	47.8	44.8	545.0	111.9	89.4
16	25.0	7.5	56.2	54.2	43.7	40.7	543.0	111.9	89.4
20	25.0	8.4	54.8	52.8	41.8	38.8	542.0	111.9	89.4
25	24.3	9.4	53.3	51.3	39.8	36.8	541.0	112.9	88.5
31.25	23.6	10.5	51.9	49.9	37.9	34.9	540.0	114.1	87.7
62.5	21.5	15.0	47.4	45.4	31.9	28.9	539.0	118.3	84.5
100	20.1	19.1	44.3	42.3	27.8	24.8	538.0	121.9	82.0
200	18.0	27.6	39.8	37.8	21.8	18.8	537.0	121.9	82.0
250	17.3	31.1	38.3	36.3	19.8	16.8	536.0	128.8	77.6
300	16.8	34.3	37.1	35.1	18.3	15.3	536.0	128.8	77.6
400	15.9	40.1	36.3	33.3	15.8	12.8	536.0	128.8	77.6
500	15.2	45.3	33.8	31.8	13.8	10.8	536.0	128.8	77.6

ORDERING INFORMATION

Order No.	SAP No.	Description
CAA-00418	Consult Molex	Cat6A 4 Pair U/FTP Gel Filled OSP Cable PE(UV)/Nylon Sheathed

Available in Various Colours, Details Upon Request

MOLEX PREMISE NETWORKS

Americas
 Tel: 630 969 4550
 www.molexpn.com

EMEA
 Tel: 44 (0)2392 205800
 www.molexpn.co.uk

APAC
 Tel: 61 3 9971 7111
 www.molexpn.com.au