

1

2

3

4

5

6

7

A

B

C

D

E






F

G

H

I

K

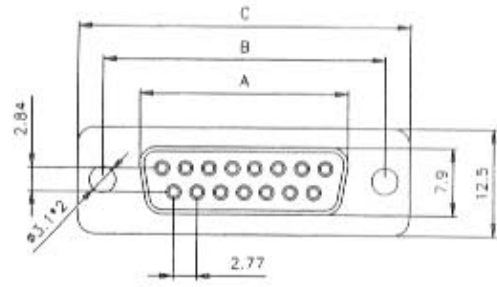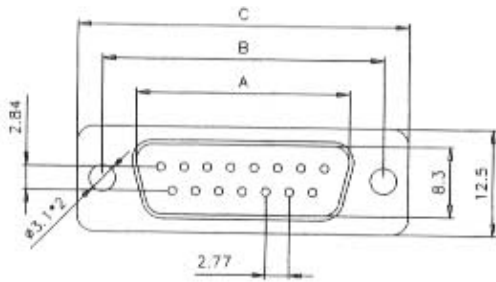

MALE

FEMALE

Insulator: PBT Glass filled, UL94V-0  
 Contact: Brass  
 Shell: Steel  
 Rating current: 3A  
 Contact resistance: <15 mOhm  
 Insulation resistance: >3000Mohm at 500V  
 Dielectric strength: 1000V at 1 minute  
 Operating temperature: -55°C to +105°C

POSITION	A	B	C	D
9F	16.30	25.00	30.8	19.2
15F	24.60	33.30	39.2	27.7
25F	38.30	47.10	53.1	41.1
37F	54.80	63.50	69.4	57.3

POSITION	A	B	C	D
9M	16.92	25.00	30.8	19.2
15M	25.25	33.30	39.2	27.7
25M	38.96	47.10	53.1	41.1
37M	55.42	63.50	69.4	57.3

Änderung

Datum

Name

Datum

Name

Benennung

Bearb. 29.03.03 Hellwig

Gepr. 25.03.03

Norm.

A-DF \*\* LL-F

A-DS \*\* LL-F

Zeichnungsnummer

Blatt

**ASSMANN**  
 Electronic Components

ASS 0384 CO

1/1

Ersatz für

Blatt

1

2

3

4

5

6

7