

QFP85P1040PD – QSFP+ Parallel Fibre 850nm / 100m / 40 Gigabit Ethernet / SR-4

#01 Overview

QFP85P1040PD is a high performance QSFP+ transceiver module for 40 Gigabit Ethernet (aggregated) data links over an OM3 multimode (50/125µm) ribbon fibre. The maximum reach¹ is 100m, with 1.9dB end of life (EOL) power budget. The transmitters are Vertical Cavity Surface Emitting Lasers (VCSEL) generating four independent parallel optical output signals. The receivers are PIN photodiodes.

This transceiver module is compliant with the Small Form-factor Pluggable (QSFP+) Multisource Agreement (MSA) and hot pluggable. Always contact SkyLane Optics® commercial agents for compatibility with different equipment platforms.

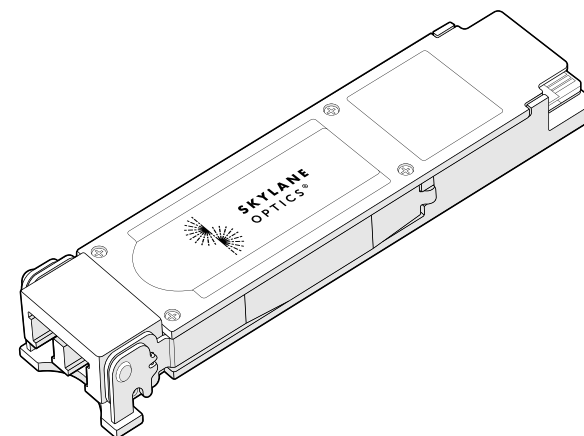


Figure 1. QSFP+
(non-binding illustration)

Datasheet QFP85P1040PD



#02 Features

- QSFP+ Multi-Source Agreement compliant [SFF-8436]
- Hot pluggable QSFP+ footprint
- Serial ID functionality supported according to [SFF-8438]
- MTP/MPO Optical Connector
- 4× 850nm VCSEL transmitters
- Up to 100m point-to-point transmission on OM3 ribbon fibre
- Operating temperature range 0°C to 70°C
- Up to 11.2Gbps per Lane
- Low power dissipation (<1.5W)
- Digital Diagnostics Monitoring (DDM)

#03 Applications

- 40GBASE-SR4
- Infiniband QDR and DDR interconnects
- Rack to Rack
- Data centres

#04 Optical Interface

P/N	QFP85P1040PD
Nominal Wavelength [nm]	850
Optical Output Power, per Lane ² [dBm]	≥ -6
Optical Receiver Sensitivity ³ , per Lane [dBm]	≤ -13
Optical Path Penalt ³ , per Lane [dB]	≤ 4
Optical Receiver Overload ⁴ , per Lane [dBm]	0
Power Budget ² , per Lane [dB]	≥ 3

1. Distance is estimated assuming typical optical losses after decent quality fibre deployment; only optical budget value is guaranteed. 2. EOL, over operating temperature range 3. Measured with 10.3125Gbps, PRBS 2³¹-1, ER=9dB 4. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers (optical loop back) before ensuring that proper optical attenuation is used

Datasheet QFP85P1040PD



#05 Technical Parameters

5.1 Recommended Operating Conditions						
Parameter	Min	Typ	Max	Unit	Notes	
Storage temperature	-40		85	°C		
Operating Case Temperature	0		70	°C		
Relative Humidity	0		85	%	Non-Condensing	
Power Supply Voltage	3.135	3.3	3.465	V		
Power Supply Current						
Power Dissipation			3.5	W		

5.2 Transmitter Optical Specifications						
Parameter	Min	Typ	Max	Unit	Notes	
Optical Output Power, each lane	-8	-2.5	2.4	dBm	5	
Optical Modulation Amplitude (OMA), each Lane	-6		3	dBm		
Difference in Output Power between any two lanes			4	dB		
Centre Wavelength	840	850	860	nm		
Transmitter and Dispersion Penalty (TDP), each Lane			4	dB		
OMA with TDP subtracted, each Lane	-7			dBm		
Optical Extinction Ratio ER	3			dBm		
Spectral Width (-20dB)			0.65	nm		

5. Output power coupled into a 50/125 µm multi-mode fibre

Datasheet QFP85P1040PD



#05 Technical Parameters

5.3. Receiver Optical Specifications					
Parameter	Min	Typ	Max	Unit	Notes
Operating Wavelength	830	850	860	nm	
Receiver Sensitivity, each Lane			0	dBm	
Receiver Sensitivity OMA, each Lane		-13		dBm	
Stressed Receiver Sensitivity OMA, each Lane			-5.4	dBm	

Datasheet QFP85P1040PD



#06 Transceiver Electrical Pad Layout

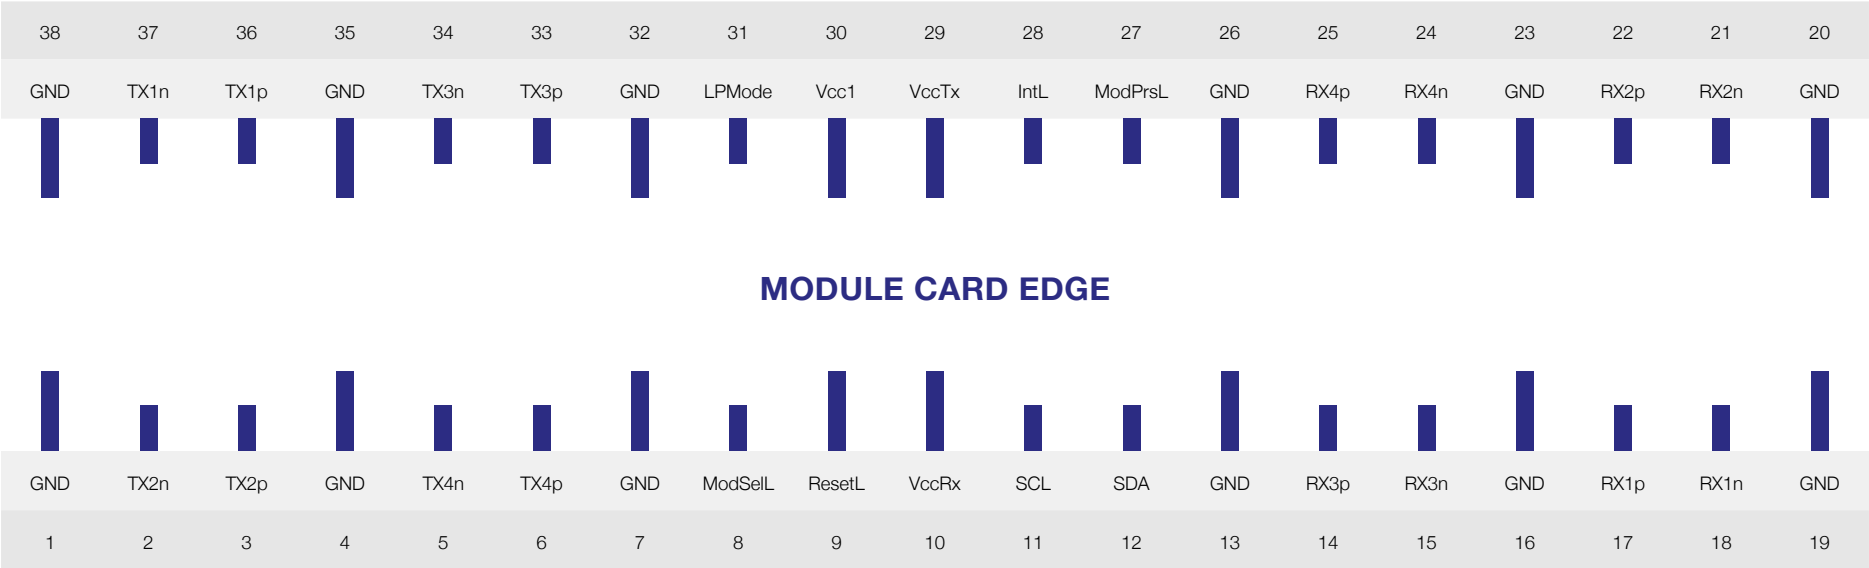


Figure 2. Transceiver Electrical Pad Layout

#07 Pin Function Definition

Pin	Symbol	Description	Pin	Symbol	Description
1	GND	Ground	20	GND	Ground
2	TX2n	Transmitter Inverted Data Input	21	RX2n	Receiver Inverted Data Output
3	TX2p	Transmitter Non-Inverted Data Input	22	RX2p	Receiver Non-Inverted Data Output
4	GND	Ground	23	GND	Ground
5	TX4n	Transmitter Inverted Data Input	24	RX4n	Receiver Inverted Data Output
6	TX4p	Transmitter Non-Inverted Data Input	25	RX4p	Receiver Non-Inverted Data Output
7	GND	Ground	26	GND	Ground
8	ModSelL	Module Select	27	ModPrsL	Module Present
9	ResetL	Module Reset	28	IntL	Interrupt
10	VccRx	+3.3V Power Supply Receiver	29	VccTx	+3.3V Power supply transmitter
11	SCL	2-wire serial interface clock	30	Vcc1	+3.3V Power supply
12	SDA	2-wire serial interface data	31	LPMODE	Low Power Mode
13	GND	Ground	32	GND	Ground
14	RX3p	Receiver Non-Inverted Data Output	33	TX3p	Transmitter Non-Inverted Data Input
15	RX3n	Receiver Inverted Data Output	34	TX3n	Transmitter Inverted Data Input
16	GND	Ground	35	GND	Ground
17	RX1p	Receiver Non-Inverted Data Output	36	TX1p	Transmitter Non-Inverted Data Input
18	RX1n	Receiver Inverted Data Output	37	TX1n	Transmitter Inverted Data Input
19	GND	Ground	38	GND	Ground

Datasheet QFP85P1040PD



#08 EEPROM - QSFP+ MSA (SFF-8438)

2-WIRE SERIAL ADDRESS : 1010000X

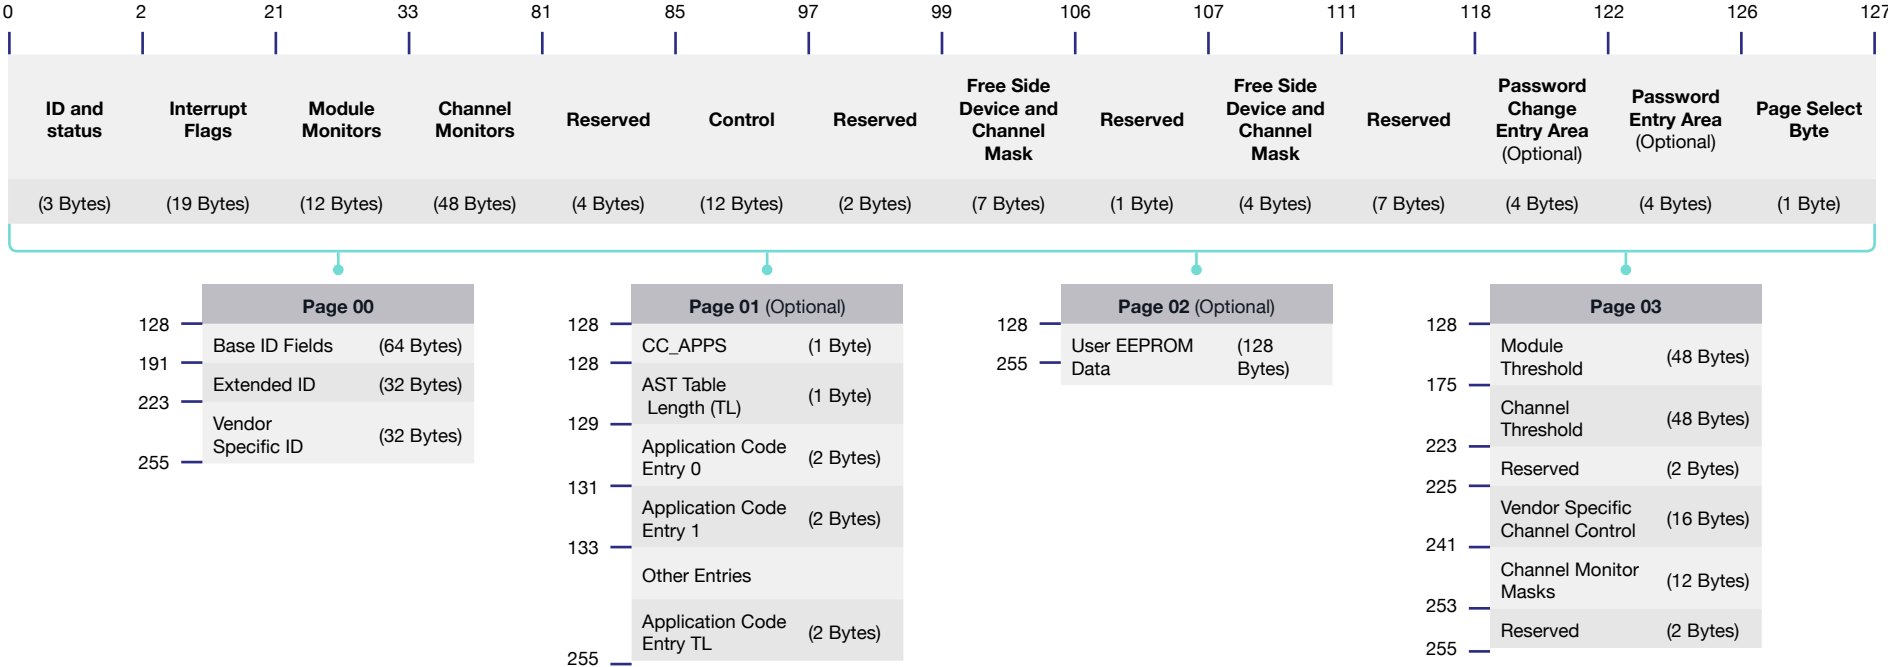


Figure 3. EEPROM of a Compact QSFP+

Datasheet QFP85P1040PD



#09 Ordering information

Part Number	QFP85P1040PD
Description	QSFP+ SR-4 40G 850nm, Tx VCSEL , Rx PIN, maximum distance 100m on OM3, power budget 1.9dB, 40x Gigabit Ethernet & Infiniband QDR, MTP/ MPO connector, 0°C to 70°C, DDM

#10 Document Revision Information

Revision	Description
RevA	Initial release
RevB	Optical interface information updated in section 2

For your product safety, please read the following information carefully before any manipulation of the box:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

Skylane Optics® supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact: support@skylaneoptics.com