

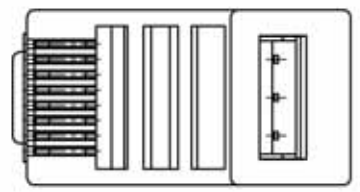
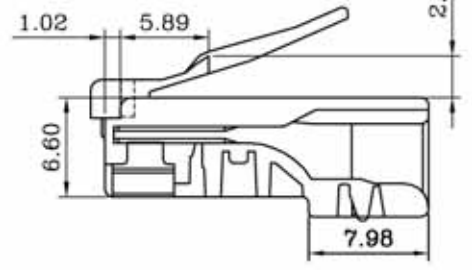
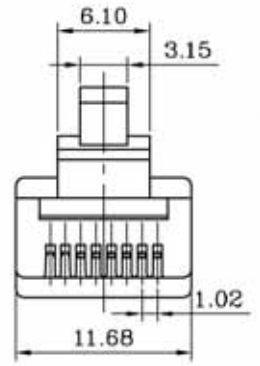



REV	DATE	MODIFICATION	DRAWN
	25/12/09		

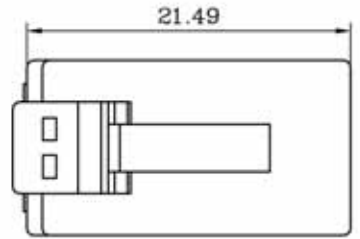

Round



Flat



SPECIFICATIONS

1.ELECTRICAL:

- UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
- DIELECTRIC WITHSTANDING VOLTAGE : 500 VOLTS AC.
- INSULATION RESISTANCE: 100 M Ω .
- TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.

2.MECHANICAL:

- CABLE-TO-PLUG TENSILE STRENGTH : 20POUND MIN.
- DURABILITY : 200 MATING CYCLES.

3.MATERIAL & FINISH:

- HOUSING: POLYCARBONATE, UL94V-2 OR UL94V-0 .
- COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
- CONTACT BLADE: COPPER ALLOY .
- CONDUCTOR : STRANDED & SOLID WIRE , 24AWG, 26 AWG.
- GOLD PLATING: 3u"-50u", ARE AVAILABLE.



BLADE:	E				
Drawing			CABLE TYPE		FLAT
Mark	✓		Mark		✓
GOLD PLATING					50u"
Mark					✓

AC			
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL PC	DWG NO. TD108
.X±0.20	.X°±5°	TITLE	
.XX±0.10	.XX°±2°	DRAWN LiJing	
APPROVAL 	CHECKED 	SCALE 2/1	SHEET 1/1
		PROJ. 	REV A