
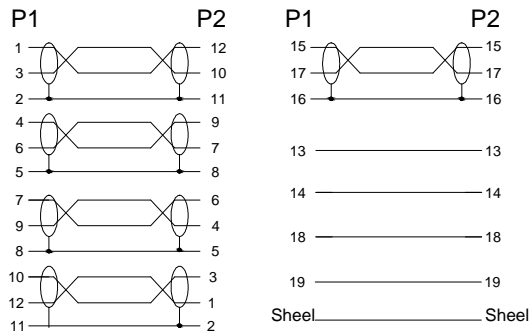


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/12/05	

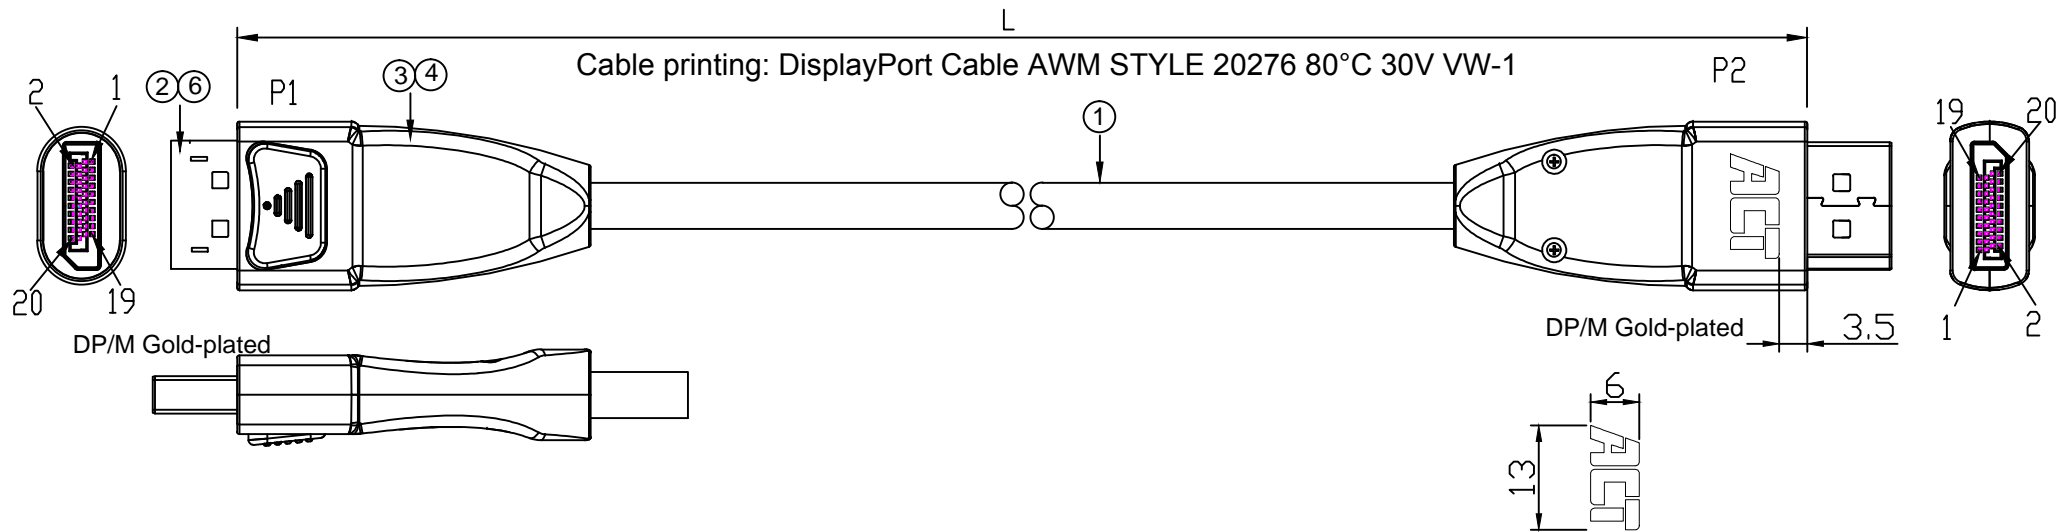


Wire method

Remark:

- 100% Open/Short Test
- Conductive Resistance:15ohms MAX
- Insulation Resistance:5M ohm MIN.
- HI-POT:DC 300V/10MS.
- The product is RoHS compliant.
- Dp to Dp 1.4V, working as 8K@60Hz,4K@120Hz and 4K@60Hz.

Item NO.	Length
AC4071	1.0m
AC4073	2.0m
AC4074	3.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑤	Lid	2PCS	PE, DP Lid
④	Shell	2PCS	Zinc alloy, Dumb gun black
③	Inernal Mold	2PCS	Inner Mould PE
②	Connector	2PCS	DP male , Gold-Plated
①	Cable		DP 1.4V28AWG [(7/0.127TC+FPE)*1P+7/0.127TC+AL]*5C+ (7/0.127TC+HDPE)*4C+AL+D+160/0.12ALB+ PVCOD7.3mmBlack



<b>ACT</b>			
ERP NO.:		SAMPLE DWG NO.:	
No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		DP Male to DP Male	
APPROVAL		CHECKED	DRAWN
		DATE	2019/12/05
		PAGE NO	1/1