


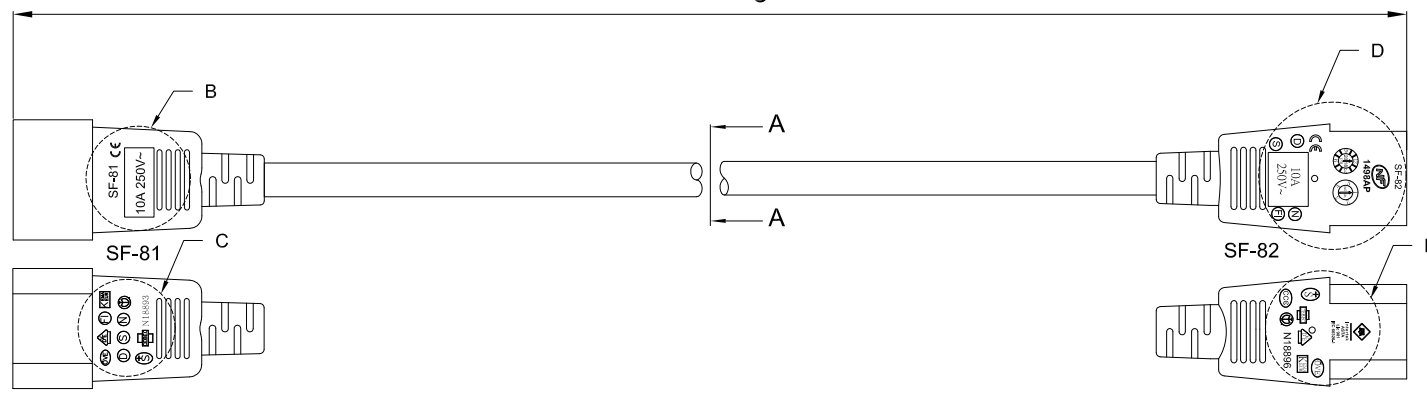


1	2
CUSTOMER NAME	
CUSTOMER Part No.	


7	8	9	10
DATE	REV	DESCRIPTION	BY
2020.11.17	A/0	NEW	XYH




CABLE MARKING ◁VDE▷ H05Z1Z1-F 3G 1.0mm²




B
2:1




C
2:1

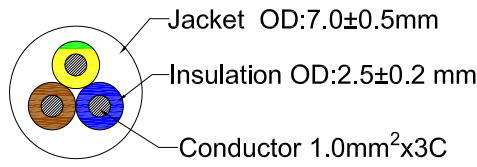


A-A



D
2:1

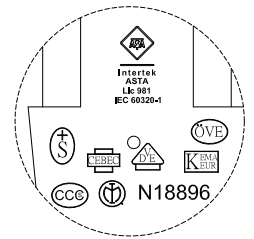

E
2:1

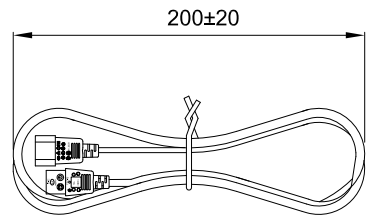

Customer Item No	Colour	Length
AK5216	Black	3000±30
AK5217	Black	5000±30

PINOUT			
SF-81		SF-82	WIRE
E		E	YE/GR
L		L	Brown
N		N	Blue

REMARKS:

- 1.POLARIZATION AND CONTINUITY TEST
- 2.DVW TEST:2000VAC,1S
- 3.PLUG(SF-81) RATED POWER:250V 10A
- 4.CONNECTOR (SF-82) RATED POWER:250V 10A
- 5.WIRE: H05Z1Z1-F 3G 1.0mm²x3C RATED VOLTAGE:300V/500V

WIRE MARKING: (Hollow)		◁VDE▷ H05Z1Z1-F 3G 1mm ² LSZH	
Key Size	△	3RD	
Length (mm)	Tolerance		
	Critical	Normal	General
0-15	±0.05	±0.10	±1.0
15-60	±0.10	±0.20	
60-150	±0.15	±0.35	±1.5
150-350	±0.20	±0.50	
350-1000	±0.40	±0.65	±2.0
Part No.	H05Z1Z1-F 3G 1.0mm ² x3C BLACK SF-81 TO SF-82 CABLE ASS'Y		
Description	UNIT	mm	APPROVAL
	PAGE	1/1	CHECKER
Draw.No.			YB
			DRAWER
			XYH