
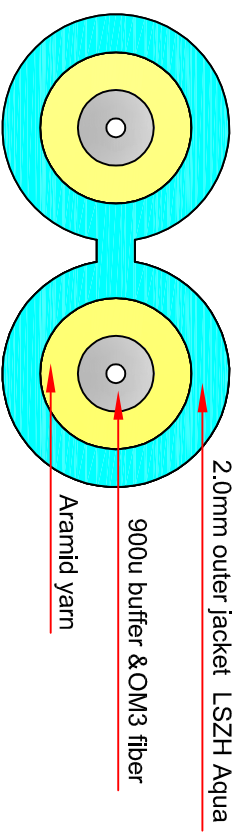


L - -L+200mm

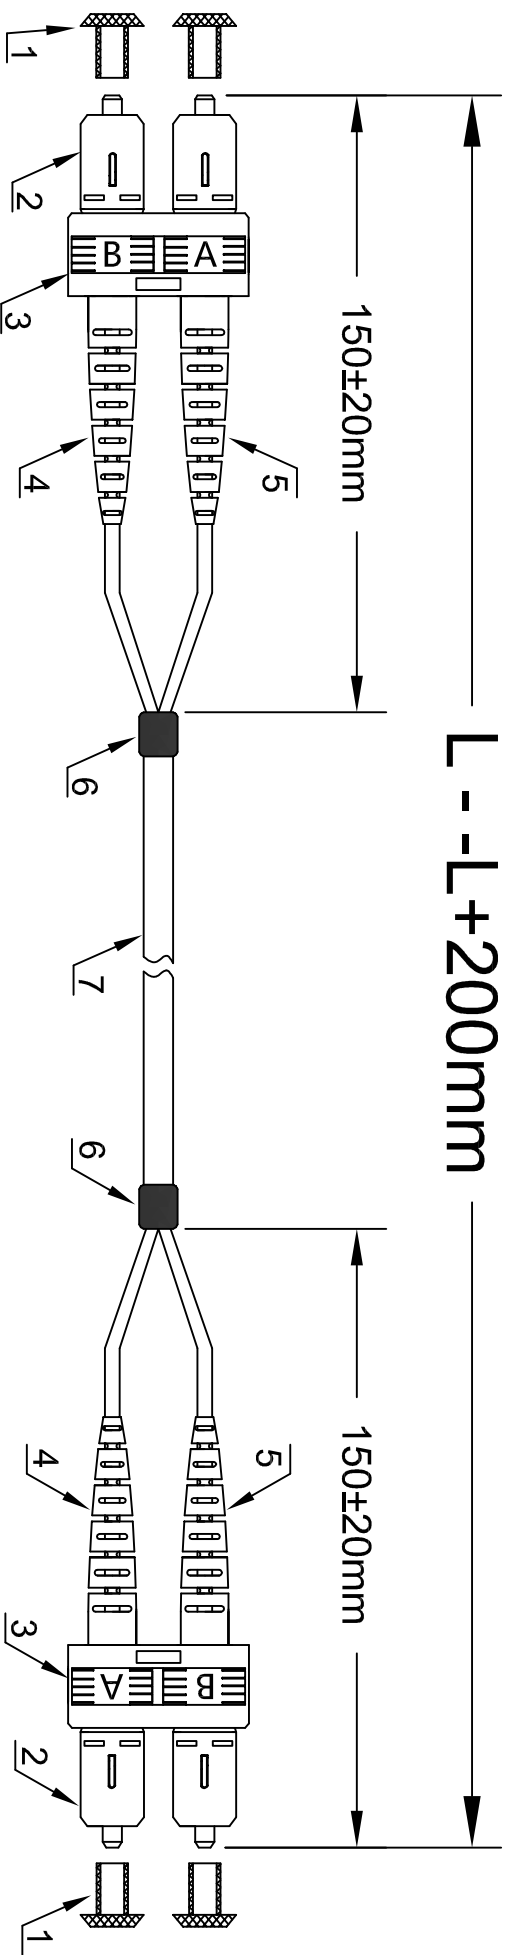

ASSEMBLY CONNECTIVITY	
SC/U/PC-1	SC/U/PC-2
A	B
B	A

ITEM NO	LENGTH
EL3601	1.00m
EL3602	2.00m
EL3603	3.00m
EL3605	5.00m
EL3610	10.00m

NOTE:

- 1.Insertion loss :SC/PC<0.25dB λ: 850&1310nm
Return loss :SC/PC≥30dB λ: 850&1310nm
- 2.Durability:500 matings
- 3.Operation temperature:-40°C to +85°C
- 4.SC connector according to IEC 61754-4

**ROHS
Compliant**

SC/PC --- SC/PC DX 2.0mm OM3 LSZH Aqua		
ITEM	Description	Q'TY
1	SC dust cover lucency	4 PCS
2	SC/PC MM simplex connector beige	4 PCS
3	SC clip beige	2 PCS
4	SC 2.0mm boot black	2 PCS
5	SC 2.0mm boot red	2 PCS
6	Breakout heat-shrink tubing black L=15mm	2 PCS
7	OD=2.0mm duplex OM3 50/125um fiber optical cable LSZH Aqua	1 PC

		Designed by:	Yong Yu	Audit:	Qihua Cheng
		Date:	2017-03-14	Approve:	Yong Huang
Unit:	mm	Sheet:	A4		
Drawing NO:	SOP-ED-170314-04-V2				