



REV	REVISIONS	DATE	APPROVED
1	NEW DESIGN	2021.10.25	

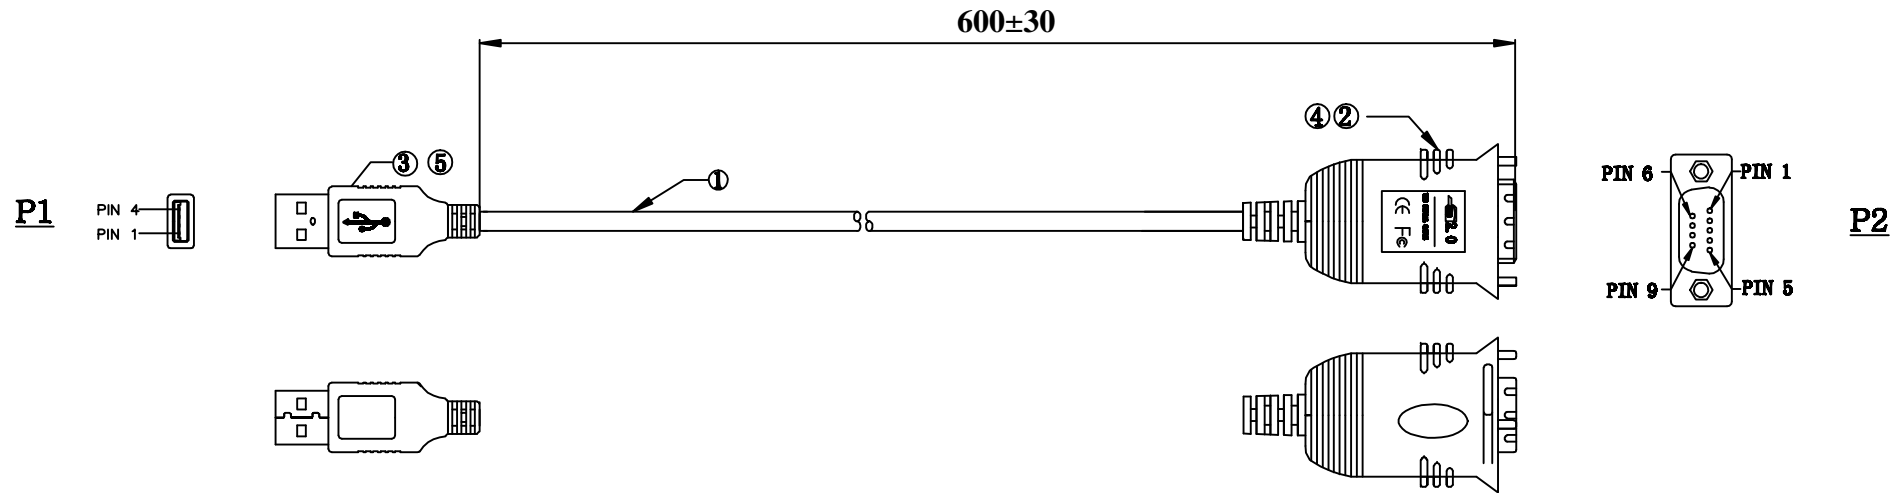

Wiring Diagram

Connection	
P1	PCB Board
1	Red
2	White
3	Green
4	Black
Shell	D+B



Electronic Test:

1. Insulation Resistance: DC300V 5 ohm/10ms
2. Contact Resistance: 3 ohm
3. 100% test when it is open and short
4. 100% computer spot testing

5	Outer Mold Material: 45P PVC Black		
4	Outer Mold Material: 35P PVC Black		
3	Plug USB2.0 A/M Nickel Plated	1	PCS
2	DB9P/M Nickel Plated+PCB Board IC:PL2303GC+ZT213	1	PCS
1	UL2725#28AWG*1P*24AWG*2C+AEB(80/0.12AM) OD=5.0MM Outer Jacket: PVC Black 65P		
No	Item	Q'TY	UNIT
NO	SPECTIFICATIONS		

ACT			
Item	USB 2.0 A/M TO DB9 RS232 Cable	Page	Scale
Drawing No	P/N	Angle	
Customer		Drawer	
Size	A4	Unit	MM
Date	2021.10.25	Approval	