


DATE	REV	DESCRIPTION	BY	CHKD


Marking: CE 17 ACT Cat6 U/UTP CU PVC 4X2XAWG24/7 C(UL)US CMX E477294-24100 IEC 60332-1-2

ANSI/TIA-568.2-D ISO/IEC 11801 Class E EN 50288 MM/DD/YY *****M

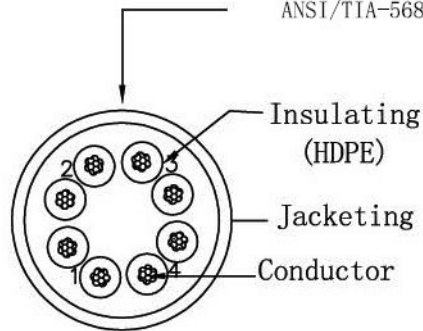

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

Conductor	bare opper AWG24 7/0.193±0.015mm
Insulation	Diameter 0.98±0.05mm
Jacket PVC	Diameter 5.5±0.5mm




100m/roll, 305m&500m/box


U/UTP CAT6 AWG24 Stranded Cable			
Item	Color		Length
EP800H	Grey	RAL7045	100M
EP840H	Ivory	RAL1015	100M
EP850H	Red	RAL3031	100M
EP860H	Blue	RAL5012	100M
EP870H	Green	RAL6016	100M
EP880H	Yellow	RAL1023	100M
EP890H	Black	RAL9011	100M
EP380B	Grey	RAL7045	305M
EP384B	Ivory	RAL1015	305M
EP385B	Red	RAL3031	305M
EP386B	Blue	RAL5012	305M
EP387B	Green	RAL6016	305M
EP388B	Yellow	RAL1023	305M
EP389B	Black	RAL9011	305M
EP845A	Ivory	RAL1015	500M

Unless specified on the drawing, tolerances are per the follows:

.X ± 1
.XX ± 0.2
.XX ± 0.05

3RD



					
DRAW.NO		ITEM	EP****		
DEPARTMENT		DRAW	Liu Shuo	DATE	2020.09.28
SCALE		CHECKER	JJJ	APPROVAL	JJJ
UNIT	MM	SHEET	1	OF	1