


Side:A


Side:B

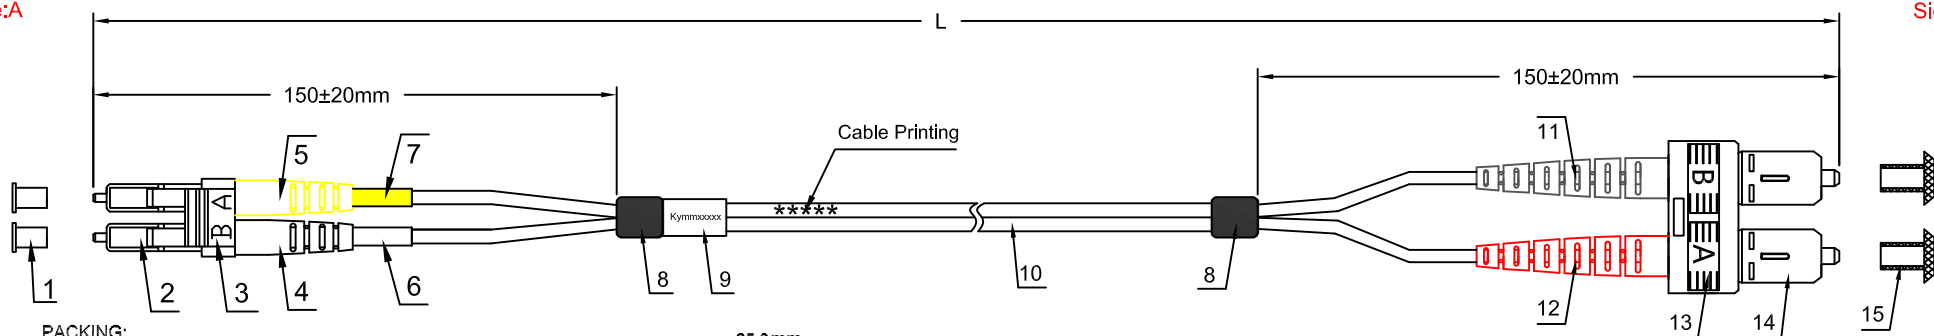


PACKING:

ROUND CABLE METHOD SEE "DETAIL A"

	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL B"



DETAIL B  
y: Year; mm: Month  
xxxx: Serial Number



DETAIL A

ASSEMBLY CONNECTIVITY	
Side:A- LC/UPC	Side:B- SC/UPC
A	B
B	A

**RL5201**


LC/UPC-SC/UPC duplex ruggedized patchcord OM3 10M

IIC: 04015001-P0015774

ACT is a registered trademark. All mentioned brand names are registered trademarks of their respective owners. Rights to the registered Names / Logos / Trademarks / Brands / Service Marks featured are property of and belong to their respective owners. Developed and styled in Europe, made in China. Misprints and errors reserved. ACT cannot be held liable or responsible for inaccurately presented content. ACT, Koolhovenstraat 1E, 3772 MT Darnweeld, The Netherlands.  
We advice to clean all the connector ferrules for optimal performance. You can find safety information at [www.act-connectivity.com/safety](http://www.act-connectivity.com/safety)

0 000000 000000

DETAIL C

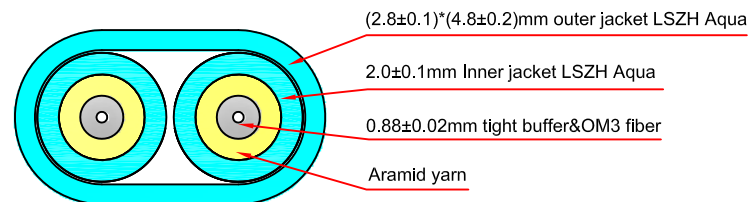

Partnumber	Length	Tolerance
RL5201	10M	0/+100mm
RL5202	20M	0/+100mm
RL5203	30M	0/+150mm
RL5204	40M	0/+200mm
RL5205	50M	0/+250mm

RoHS  
Compliant

LC/UPC --- SC/UPC duplex (2.8±0.1)\*(4.8±0.2)mm OM3 LSZH Aqua

ITEM	Description	Q'TY
1	LC dust cover white	2 PCS
2	LC/UPC MM duplex connector beige	1 PC
3	LC clip beige	1 PC
4	LC short boot white L=19.5±0.5mm	1 PC
5	LC short boot yellow L=19.5±0.5mm	1 PC
6	LC heat-shrink tube white	1 PC
7	LC heat-shrink tube yellow	1 PC
8	Breakout heat-shrink tube black L=15mm	2 PCS
9	Cable lable	1 PC
10	OD=(2.8±0.1)*(4.8±0.2)mm duplex OM3 fiber optical cable LSZH Aqua	1 PC
11	SC boot black	1 PC
12	SC boot red	1 PC
13	SC clip beige	1 PC
14	SC/UPC MM simplex connector beige	2 PCS
15	SC dust cover lucency	2 PCS



Designed by:		Audit:	
Date:	2021-06-11	Approve:	
Unit:	mm	Sheet:	A4
Drawing NO:	RL52xx LC/UPC-SC/UPC duplex patchcord OM3-V1		

## Product Specification

### Standard Compliances

1. ANSI/TIA-568.3-D.
2. ISO 11801 OM3 /IEC60793-2-10 type A1a.
3. Telcordia GR-326-CORE Issue 4 February 2010 Compliance.
4. RoHS Compliance for the Requirement of European Union Issued Directive 2011/6S/EU.

### Construction&Characteristics

Optical Performance	Insertion loss typical	0.15dB
	Insertion loss maximum	0.25dB
	Return loss	≥30dB
	Polish	UPC
Connector	Connector A side	IEC61754-20 LC connector
	Connector B side	IEC61754-4 SC connector
	Ferrule	Ceramic Zirconia (ZrO <sub>2</sub> )
Cable	Fiber class	OM3
	Fiber type	Multimode 50/125
	Cable type	(2.8±0.1)*(4.8±0.2)mm LSZH aqua
	Tensile strength	200N (short time 400N)
	Operation temp.	-20 °C to +80 °C (5 cycles)
	Vibration	10 to 55 Hz 15mm double amplitude
Marking	ACT Premium Multimode Fiber Optic Patch Flat Oval cable 50/125µm,OM3,LSZH xxxxM	

### 100% tested and approved

1. ACT advises to clean every connector ferrule before usage to get optimal performance.
2. Always leave the dust caps on if the cable isn't installed.