


1	2
CUSTOMER NAME	
CUSTOMER Part No.	AK5076

7	8	9	10
DATE	REV	DESCRIPTION	BY
2015.6.1	A/0		

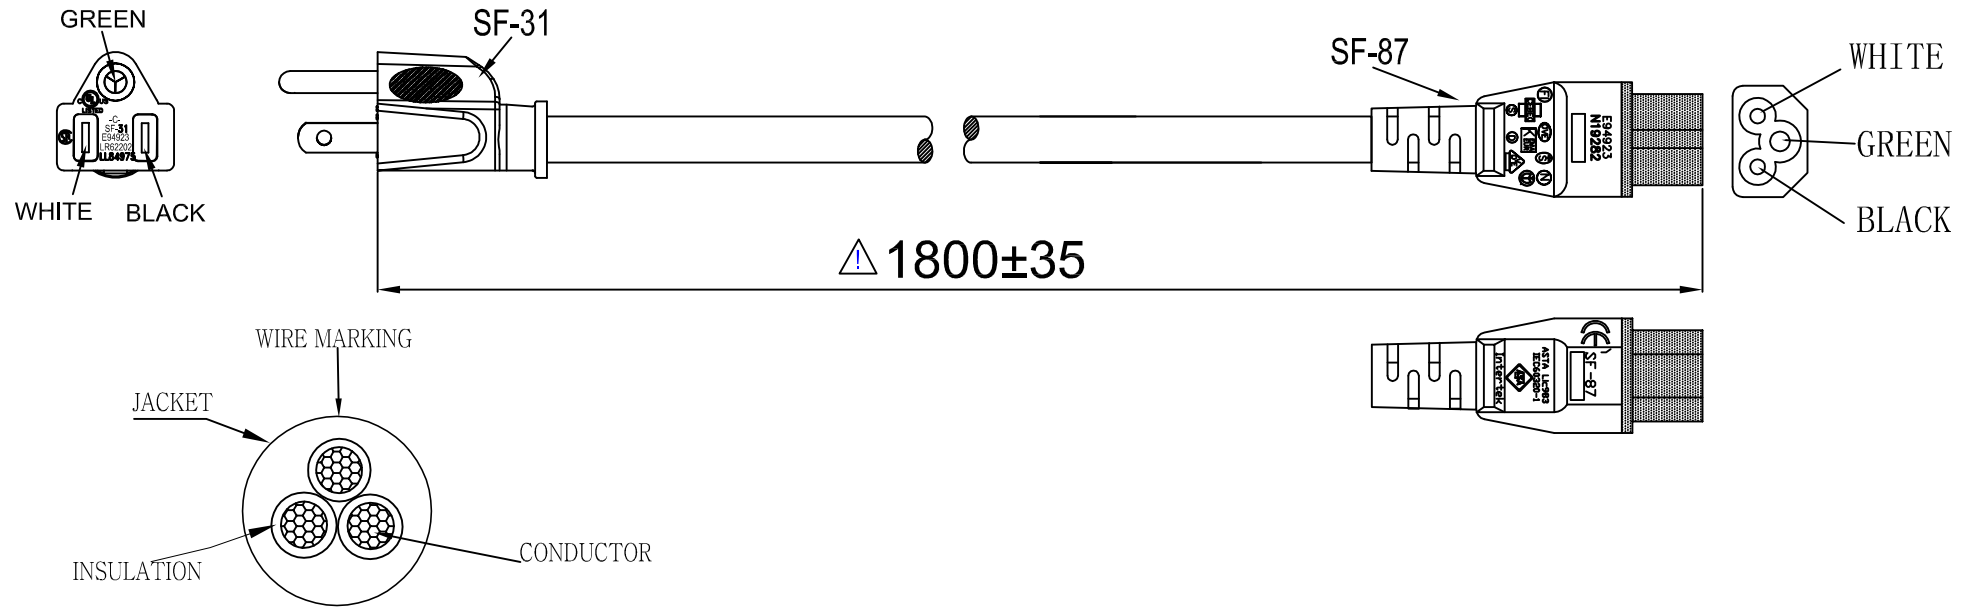

REMARKS:

- 1.PLUG(SF-31) RATED POWER:125V 10A
- 2.CONNECTOR(SF-87) RATED POWER:125V 10A
- 3.WIRE: SJT 18x3C 60° RATED VOLTAGE:300V
- 4.COLOR:BLACK
- 5.DVW TEST:1500VAC,1S
- 6.POLARIZATION AND CONTINUITY TEST
7. COMPLY WITH UL817 STANDARD

WIRE MARKING: (UL) E135710-F3 SJT 3X18AWG 60 °C 300V VW-1 CSA LL95737	
(Hollow) SJT 3X0.824mm2(18AWG) 60 °C 300V FT2	
Key Size	△ 3RD
Length (mm)	Tolerance
	Critical Normal General
0-15	±0.05 ±0.10 ±1.0
15-60	±0.10 ±0.20 ±1.0
60-150	±0.15 ±0.35 ±1.5
150-350	±0.20 ±0.50 ±1.5
350-1000	±0.40 ±0.65 ±2.0
AC	
Part No.	AK5076
Description	SF-31+SF-87 SJT 3 X 18AWG BK
UNIT	mm
PAGE	1/1
Draw.No.	

A
B
C
D
E
F
G

A
B
C
D
E
F
G