


MOLDING:  
SF-04  
SF-82


DATE	REV.	REVISION	DRAFTING	CHECKED
2021/05/21	A/0	Initial	Bob.Chen	

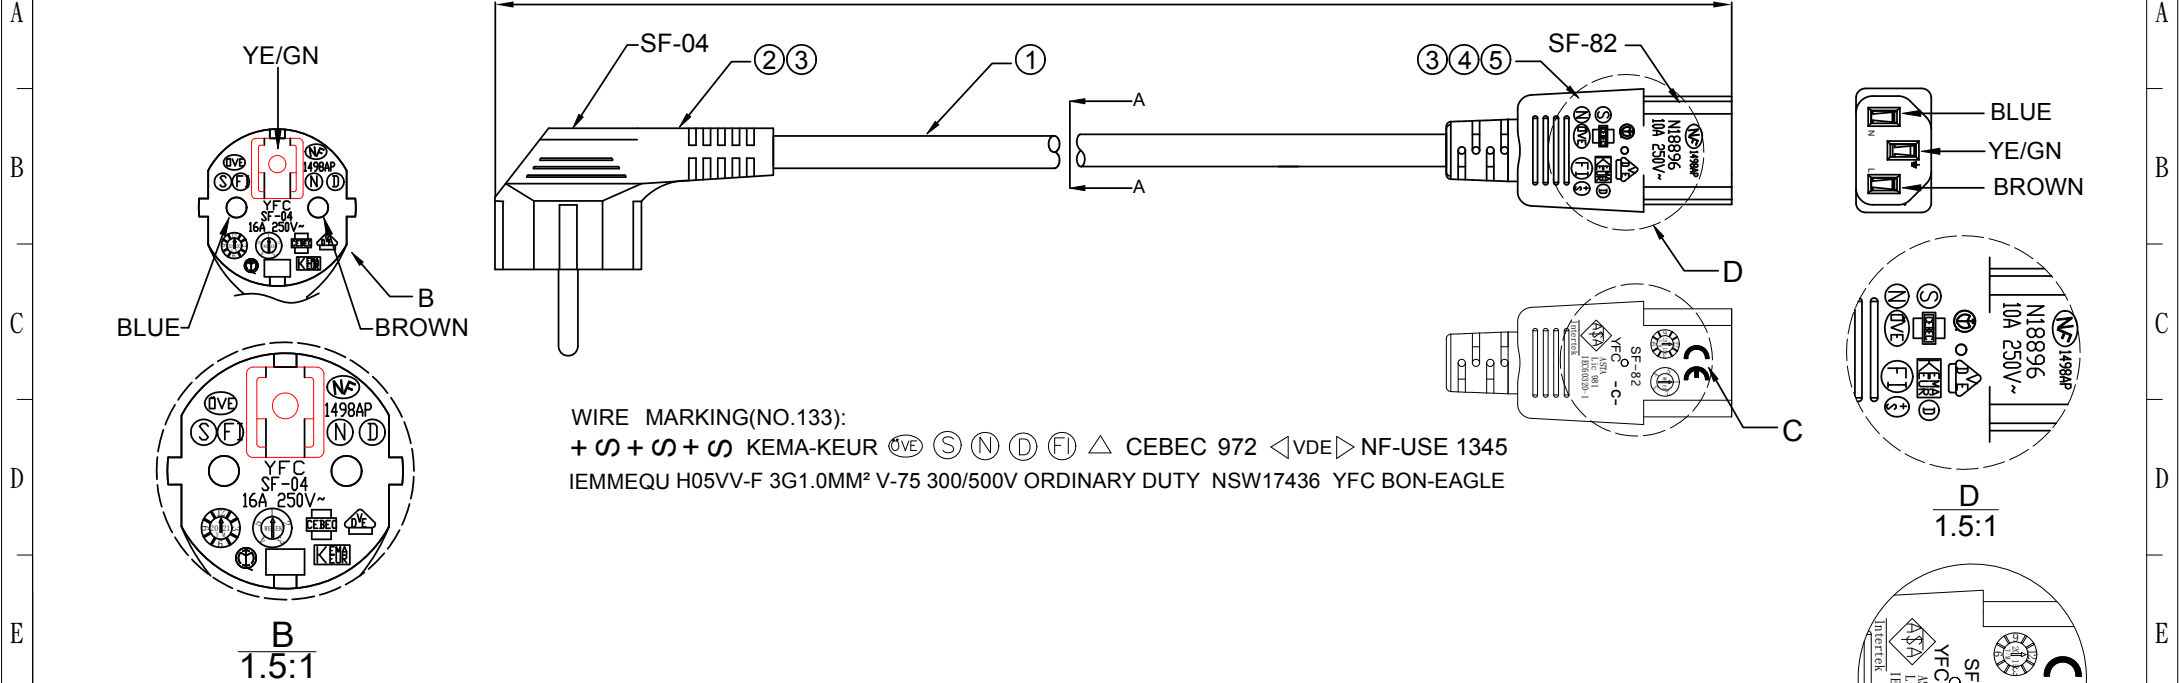

WIRE MARKING(No.133):  
 + S + S + S KEMA-KEUR (V) (S) (N) (D) (FI) △ CEBC 972 <VDE> NF-USE 1345  
 IEMMEQU H05VV-F 3GX1.0MM² V-75 300/500V ORDINARY DUTY NSW17436 YFC BON-EAGLE

Item	Color	RAL NO. (similar to)	Length
AK5403	RED	RAL3020	5000±30
AK5404	BLUE	RAL5012	5000±30
AK5405	GREEN	RAL6018	5000±30
AK5406	YELLOW	RAL1018	5000±30
AK5131	RED	RAL3020	3000±30
AK5135	BLUE	RAL5012	3000±30
AK5139	GREEN	RAL6018	3000±30
AK5143	YELLOW	RAL1018	3000±30

Polarity and Conduction and Penetration Test	
Dielectric Voltage Withstand Test : 2000V / 1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor Resistance	≤ 19.5Ω/1000m
Voltage Rating	AC 300V/500V

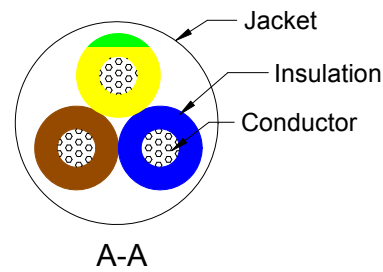

PINOUT		
SF-04	WIRE	SF-82
E	YE/GN	E
L	BROWN	L
N	BLUE	N

No.	TITLE	DESCRIPTION	Q'TY
⑤	Housing	IEC C13 three Pin(SF-82)inner frame , Black	1PC
④	Terminal	IEC C13 Female terminal,matching 20-16AWG wire	3PCS
③	Molding	50P PVC	A/R
②	Terminal	European standard,black french connector SF-04.	1PC
①	CABLE	H05VV-F 3GX1.0mm² PVC	A/R

Unless specified on the drawing, tolerances are per the follows: X. ±0.20 X° ±3 .X ±0.10 .X° ±0.3 .XX ±0.05		DRAW. NO	YFAC-S210105	TITLE	H05VV F1.0mm*3C SF-04 TO SF-82 CABLE ASSY		
		CUSTOMER	ACT	DRAW	Bob.Chen	DATE	2021.05.21
		CUST' R P/N	--	CHECK	DATE		
		SCALE	NONE	UNIT	mm	APPROVED	SHEET 1 of 1



Cable Spec NO.	--	Part Number	--	Note	<input type="checkbox"/> RoHS2.0	<input type="checkbox"/> Reach	<input type="checkbox"/> GP	<input type="checkbox"/> HF	<input type="checkbox"/> Other
----------------	----	-------------	----	------	----------------------------------	--------------------------------	-----------------------------	-----------------------------	--------------------------------