

Page 1 of 1

DRAWN 01.09.2021 BY LSA

AK5194

PC1476

CABLE REQUIREMENTS:

Colour: RED (RAL 3020)

Type: 3 Core 1.00mm² H05VV-F

(European Approved)

Conductor Colour Codes:

Earth (Green & Yellow)

Neutral (Blue) Live (Brown

Complete Powerlead Rated: 10A/250V

PLUG / END A REQUIREMENTS:

Type: SW906

Colour: BLACK

Rating: 10A

Reference:

C14 Connector (European Approved)

CONNECTOR / END B REQUIREMENTS:


Type: SW905

Colour: BLACK

Rating: 10A

Reference:

C13 IEC Lock Connector (European Approved)

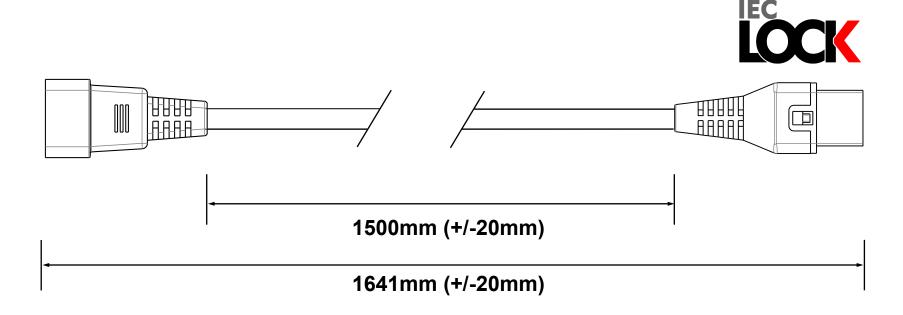

EXTRA REQUIREMENTS:

PACKAGING OUTERTBC
PIN PROTECTING COVERNO

WIRING INSTRUCTIONSNO

PRE-SHIPMENT INSPECTION REQUIRED....NO

COMMENTS: No cover over RED slide tab. Box quantity to be confirmed based on gross weight being no greater than 20Kg. CHANGE MANAGEMENT:

HANKING

Loose

TERMINATIONS / FURTHER COMMENTS: