
| | Page 1 of 1 | | | DRAWN 29.10.2019 BY RKT | | |
|----------|---------------------|---|----------------------------|-------------------------|---------------------------------|------------------------|
| | CABLE REQUIREMENTS: | | PLUG / END A REQUIREMENTS: | | CONNECTOR / END B REQUIREMENTS: | |
| | Colour: | RED | Туре: | SW906 | Туре: | SW905 |
| Earth (G | Туре: | 3 Core 1.00mm ² H05VV-F (European Approved) | Colour: | BLACK | Colour: | BLACK |
| | | nductor Colour Codes: rth (Green & Yellow) | | 10A | Rating: | 10A |
| PC1387 | Live (Brown | | Reference: | C14 Connector | Reference: | C13 IEC Lock Connector |
| | Complete Po | owerlead Rated: 10A/250V |] | (European Approved) | | (European Approved) |

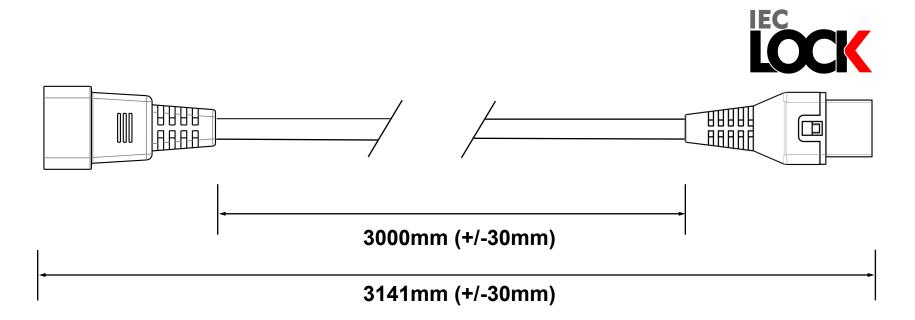

| EXTRA REQUIREMENTS: | CHANGE MANAGEMENT: | HANKING | TERMINATIONS / FURTHER COMMENTS: |
|--|--------------------|---------|----------------------------------|
| PACKAGING OUTER50 | | | |
| PIN PROTECTING COVERNO | | | |
| WIRING INSTRUCTIONSNO | | Loose | |
| PRE-SHIPMENT INSPECTION REQUIREDNO | | | |
| COMMENTS: With NO knock out cover over red slide bar | | | |