4 – Port Quad View DVI USB KVM

RD1041Q / RD1041K

Easiest Solution for Multitasking on Various Computers





Conventional KVM is designed to manage computers on a single monitor one at a time. But think different; why not manage all computers all-in-one-time? That's what RD1041Q/K, 4–Port Quad View DVI USB KVM, is capable of: 4-in-1 Quad View, which is truly an effort and time-saving solution for admin who wishes to deal with multiple computers all together. The sturdy case and rack-mountable design makes it compatible with most environments: control rooms, server farms, security systems and etc. Available display modes are: Full Screen, 3-in-1 PAP, Picture in Picture, & 4-in-1 Quad View, providing ample choices per users' preference.

Dedicated Single View Monitor

Use as the main working view, this console will serve as your command center to integrate data on multiple systems, with high resolution digital resolution, audio / mic access, and keyboard / mouse interfaces. Dedicated Monitor simplifies your work without accidental changing system view as you create.


Multiple Display Modes

Display Mode selection includes following: Full Screen, 3-in-1 PAP, Picture in Picture, & 4-in-1 Quad View. Its versatile application can match with every demand. Switch between above modes by Hotkey, OSD, or front panel Push Buttons.

Features

- 4-Port Quad View DVI USB KVM
- Control four USB computers with a single set of keyboard, mouse and DVI monitor
- 4-in1 display in timely fashion for easy management of multiple computers
- Ample choices of Display Mode: Full Screen, 3-in-1 PAP, Picture in Picture, & 4-in-1 Quad View
- Supports direct connection of 100m or 200m with gigabit Ethernet switch (RD1041K only)
- Intuitive mode selection by Hotkey, OSD, or front panel Push Buttons
- Stereo sound quality for both computer & console sides
- 1920 x 1200 resolution for clear and sharp video output
- Sturdy metal rack-mountable casing designed for 1 U application

Compatible with control rooms, server farms, and security systems

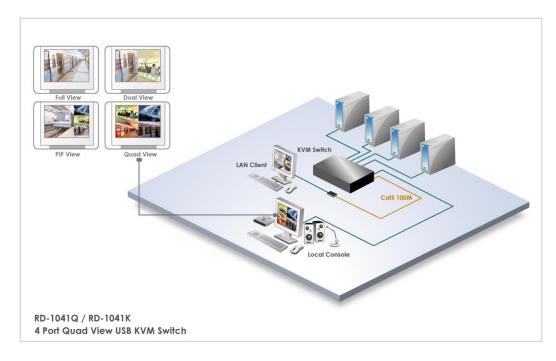

Specifications

Model No.	RD1041Q	RD1041K
Number of Ports	4	
Number of Console	1+1	1 + 2
Console Keyboard / Mouse Connector	2 x USB Type A Female	
USB Device Connector	2 x USB 2.0 Type A Female	
Console Video Connector	2 x DVI-I Female	
Console Audio / Mic Connector	2 x 3.5mm Audio / Mic Jack Female	
PC USB Connector	4 x USB Type B Female	
PC Video Connector	4 x DVI-I Female	
PC Audio / Mic Connector	8 x 3.5mm Audio / Mic Jack Female	
PC Selection	Push Button / OSD / Hotkeys	
Companion Device		RD1041-RX
Remote I/O Connector		1 x RJ45 Female
Display Resolution	1920 x 1200 (max)	
Operation Temperature	0 ~ 40 °C	
Storage Temperature	- 20 ~ 60 °C	
Humidity Limits	0 ~ 90 % RH, Non-condensing	
Power Receptacle	DC 9V	
Dimension	438 x 200 x 44 mm	
Safety / Emission	FCC, CE	