
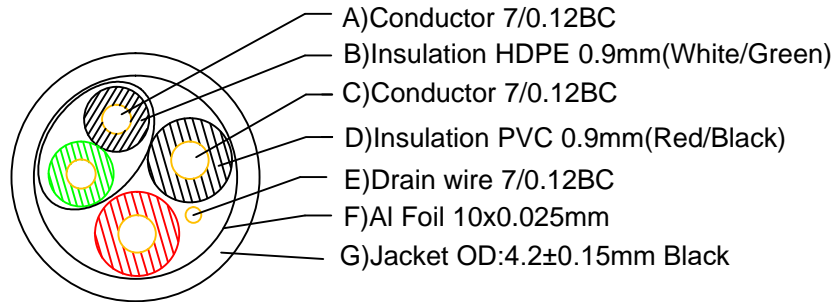
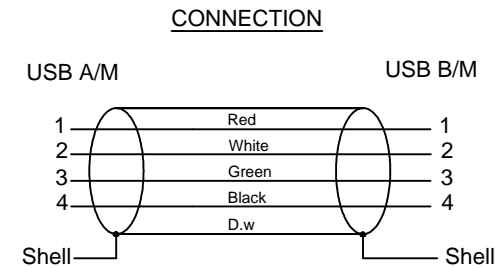


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE		

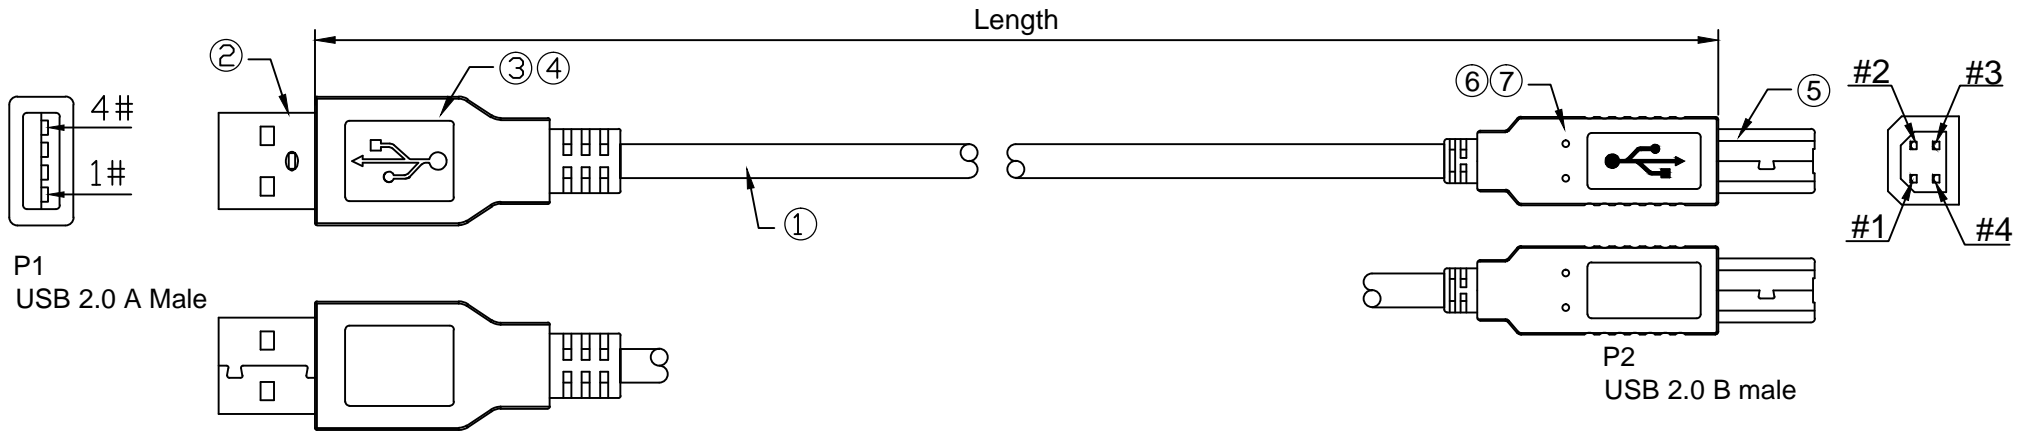


Remark:
 1.100% Open/Short Test
 2.Conductive Resistance:2ohms MAX
 3.Insulation Resistance:5M ohm MIN.
 4.The product is RoHS compliant.

Item NO.	Length(m)
EC2402	1.8m
EC2403	3.0m

28+28AWG USB Cable Spec.

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑦	External Mold	Outer Mould 45P PVC, Black	1PC
⑥	Innernal Mold	Inner Mould PE	1PC
⑤	Connector	USB B Male, Nickle-Plated	1PC
④	External Mold	Outer Mould 45P PVC, Black	1PC
③	Innernal Mold	Inner Mould PE	1PC
②	Connector	USB A Male, Nickle-Plated	1PC
①	Cable	28+28 USB Cable OD:4.2mm 28+28 (7/0.12BC+HDPE)*1P + (7/0.12BC +PVC)*2C+7/0.12BC+AL +OD4.2PVC Black	



EMINENT			
ERP NO.:		SAMPLE DWG NO:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	28+28 USB Printer Cable USB A Male TO USB B Male	PAGE NO	1/1
		DATE	
APPROVAL		CHECKED	
		DRAWN	