


Pitch (mm)	2,54
Mating pin size (range)	? 0,64
Cable termination	Crimp
No of contacts	10
Polarising	Yes
Locking	No
Material contact	Copper alloy
Material insulator	Thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	250 V <sub>RMS</sub> / V <sub>DC</sub>
Withstand voltage	600 V <sub>RMS</sub> for 1 minute
Operating temperature	-25°C to +105°C
Packaging	Standard

Crimphousings with a 2,54 mm pitch. Compatible with industries standard.  
**Contacts are not included.**

Double row with polarization.

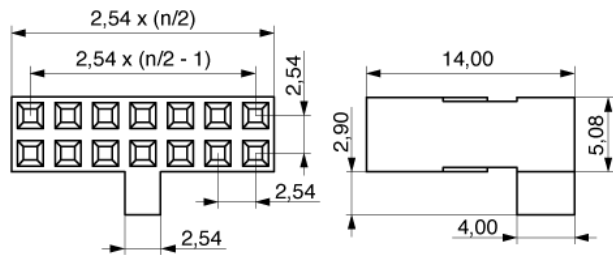

Date: 18.04.2011

**Order code: 430-3-010-X-KS0**



MPE Garry GmbH  
 Schäfflerstraße 13  
 87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0  
 Fax: +49 (0) 83 62 / 91 56-500  
 Email: [vk@mpe-connector.de](mailto:vk@mpe-connector.de)

Internet: [http://www.mpe-connector.de/index.php?lang=en&menu=4&s\\_product=430-3-010-X-KS0](http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=430-3-010-X-KS0)