


Order code: 433-1-004-X-KS0

6) WIRE TO BOARD

Series:

433

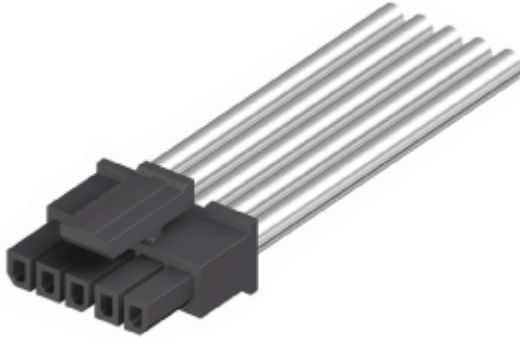


Pitch (mm)	3,00
Mating pin size (range)	U 0,68, ? 0,64
Cable termination	Crimp
No of contacts	4
Polarising	Yes
Locking	Positive lock
Material contact	Copper alloy
Material insulator	Thermoplast UL94V-0
Rated current	5,0 A
Rated voltage	250 V _{RMS} / V _{Dc}
Withstand voltage	1500 V _{RMS} for 1 minute
Operating temperature	-25°C to +85°C
Packaging	Standard
A	12,85
B	9,00

Crimphousings with a 3,00 mm pitch with locking feature. Compatible with industries standard.

Contacts are not included.

Single row version.

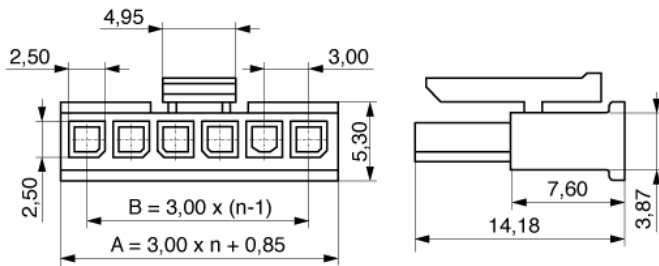

Date: 18.04.2011

Order code: 433-1-004-X-KS0



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=433-1-004-X-KS0