

DATA SHEET

One (1) fiber DVI KVM Extender, KVMX-200-TR

Contents

- ◆ Description
- ◆ Features
- ◆ Applications
- ◆ Absolute Maximum Ratings
- ◆ Recommended Operating Conditions
- ◆ Electrical Power Supply Characteristics
- ◆ DVI Electrical Characteristics
- ◆ Optical and Electrical Characteristics
- ◆ RS-232C Characteristics
- ◆ Drawing of transmitter and receiver
- ◆ DVI Pin Description/RS-232C Pin Description

Headquarters

Opticis Co., Ltd.
16Fl, Kins Tower
8 Sungnam-daero, 331 beon-gil,
Bundang-gu,
Seongnam-si, Gyunggi-do, 463-844
South Korea
Te l: +82 (31) 719-8033
Fax: +82 (31) 719-8032

One (1) fiber DVI KVM Extender, KVMX-200-TR

Description

New DVI optical KVM extender, KVMX-200-TR is designed to be used at various long haul KVM applications. KVMX-200-TR transmits DVI, USB HID, PS/2, RS-232 and bi-directional stereo audio signal up to 1.0km (3,280feet) over one (1) LC single-mode fiber. As an option, user can select one (1) or two (2) fibers connection by SFP module.

Designed for high resolution performance, it guarantees lossless image quality and no frame dropping to deliver perfect graphic data transmission up to WUXGA (1920x1200) at 60Hz.

It provides Auto-mix EDID programming feature that reads EDID information from both local and remote side displays and then determines the lowest resolution of them. It makes the installation of KVMX-200-TR easy and flexible at any variable resolutions.

Optionally, we could include convenient remote console switch and Indicator for selecting local control or remote control.

The shipping group is as follows;

- 1) One (1) pair of Transmitter and Receiver
- 2) Two (2) +12V/3A power adaptors
- 3) User Manual

Options

- 1) Remote console switch (LSKP-1003) and Indicator (RSKP-1003)
- 2) 19" 1RU mounting rack (OPMCR-1U), mounting bracket (OPMCB), fiber-optic cable

Ordering Information

- 1) KVMX-200-TR: One (1) single-mode fiber connection by SFP module
- 2) KVMX-201-TR: Two (2) single-mode fibers connection by SFP module
- 3) KVMX-202-TR: Two (2) multi-mode fibers connection by SFP module

Note: Opticis recommend user to use the SFP module, supplied by Opticis for stable connection. If user uses other SFP modules, it might cause malfunction or failure to properly use the product.

Features

- ◆ One (1) or Two (2) fibers connection by SFP module.
- ◆ Transmits DVI, USB HID, PS/2, RS232 and audio signal up to 1km (3,280feet) over one (1) LC optical fiber.
- ◆ Supports up to **WUXGA (1920x1200)** resolution at 60Hz.
- ◆ Operates with both single and multi-mode optical fibers.
 - Up to **1.0km (3,280feet)** with one (1) or two (2) LC single-mode fibers.
 - Up to **300m (985feet)** with two (2) LC multi-mode fibers.
- ◆ **Auto-mix EDID** features
- ◆ Saves cost & installation space.
- ◆ Offers DVI, USB, and PS/2 Loop through ports for Local display and Keyboard / Mouse
- ◆ Supports bi-directional stereo audio.
- ◆ Lossless Image Quality with no Frame Dropping.
- ◆ Supports DIO port
- ◆ Provides Serial Control Data: RS232C through 9 pin D-sub connector.
- ◆ Offers optional remote console switch (option)
- ◆ 19" 1RU mounting rack, mounting bracket (option)
- ◆ Size (WDH): 216mm x 112mm x 44mm
- ◆ Power supplying: +12V, 3A power adapter
- ◆ Certifications: CE / FCC

Applications

- ◆ Keyboard, mouse and video extension and routing system related with servers or PCs control.
- ◆ Digital display system integration for medical, military, aerospace, factory automation, and traffic control platforms.
- ◆ Digital FPD, PDP and projector installation in conference rooms, auditoriums and for kiosk systems
- ◆ LED signboards for large scale information display and stadiums

Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
Storage Temperature	T_{stg}	- 30	+ 70	°C
Supply Voltage	V_{CC}	10	14	V
Transmitter Differential Input Voltage	V_d	-	1	V
Operating Humidity	RH	10	85	%
Lead Soldering Temperature & Time	-	-	-	260°C, 10 sec

Recommended Operating Conditions

Parameter	Symbol	Minimum	Typical	Maximum	Units
Ambient Operating Temperature	T_A	0		+ 50	°C
Data Output Load	R_{LD}		50		Ω
Power Supply Rejection (Note1)	PSR		50		mV _{p-p}
Supply Voltage	V_{CC}	+ 11.4	+ 12.0	+ 12.6	V

Note1. Tested with a 50mV_{p-p} sinusoidal signal in the frequency range from 500 Hz to 500 MHz on the V_{CC} supply with the recommended power supply filter in place. Typically less than a 0.25 dB change in sensitivity is experienced.

Electrical Power Supply Characteristics

($T_A = 0$ °C to +50 °C, unless otherwise noted)

One (1) Single-mode fiber & Two (2) Multi-mode fibers standard

Parameter	Symbol	Minimum	Typical	Maximum	Units	
Supply Voltage	V_{CC}	9.0	12	14.0	V	
Supply Current	TX	I_{TCC}	480	570	680	mA
	RX	I_{RCC}	350	420	500	mA
Power Dissipation	TX	P_{TX}	5.76	6.84	8.16	W
	RX	P_{RX}	4.20	5.04	6.00	W

DVI Electrical Characteristics

Transmitter						
Parameter	Symbol	Minimum	Typical	Maximum	Units	
TMDS	Data Output Load	R_{LD}		50	Ω	
	Graphic Supply Voltage (Note2)	GV_{CC}	+ 3.1	+ 3.3	+ 3.5	V
	Single-Ended High Level Input Voltage	GV_{IH}	$GV_{CC} - 0.01$	GV_{CC}	$GV_{CC} + 0.01$	V
	Single-Ended Low Level Input Voltage	GV_{IL}	$GV_{CC} - 0.6$	-	$GV_{CC} - 0.4$	V
	Single-Ended Input Swing Voltage	GV_{ISWING}	0.4	-	0.6	V
Receiver						
Parameter	Symbol	Minimum	Typical	Maximum	Units	
TMDS	Data Input Load	R_{LD}		50	Ω	
	Graphic Supply Voltage (Note2)	GV_{CC}	+ 3.1	+ 3.3	+ 3.5	V
	Single-Ended Output Swing Voltage (Note3)	GV_{ISWING}	0.2	-	0.4	V

Note2. Graphic Supply Voltage is regulated reference voltage for signal processing in modules

Note3. TMDS outputs are coupled in AC

Optical & Electrical Characteristics

(T_{op} = 25°C)

One (1) Single-mode fiber standard

Parameters		Symbol	Condition	Unit	Min.	Typ.	Max.	Remark
Bit Rate	BR		Gb/s	9.95		10.3		
Bit Error Ratio	BER					10 ⁻¹²		
Fiber Length 9µm core SMF			10 ⁻¹⁰ BER, 155Mbps/1.62Gbps	km	1			
TRANSMITTER								
Average Launched Power		P _O	I _f =I _{BIAS} + I _{mod} /2	dBm	-8.2		+0.5	
Extinction Ratio		ER		dB	3.5			
Optical Wavelength		λ _c	CW, @ P _{OUT}	nm	1260		1355	
Data Input Diff Voltage		V _{IN,pp}		mV	180		700	
Optical Modulation Amplitude(OMA)		P _{OMA}		dBm	-5.2			
RECEIVER								
Sensitivity		R _{SENSI}		dBm			-12.6	
Wavelength				nm	1260		1600	
Average Receive Power		P _{AVE}		dBm	-14.4		+0.5	
Data Output Diff Swing		V _{in,pp}		mV	300		850	
LOS Hysteresis				dB	0.5			
Audio/MIC (Analog)								
Analog Sample Rate		F _{audio_a}		kHz		192		
Input level		A _{in}		V _{pp}		0.56V _{ss}		
Output level		A _{out}	V _{pp} =3.3V/Analog	V _{pp}		0.65		
Input Impedance				kΩ		25		
Output Impedance				Ω		100		

Optical & Electrical Characteristics

(T_{op} = 25°C)

Two (2) Single-mode fibers standard

Parameters	Symbol	Condition	Unit	Min.	Typ.	Max.	Remark
Data Rate	BR	4.915/6.144Gb/s	Gb/se c	1.228		6.144	
Bit Error Rate	BER	1.228/2.457Gb/s				10 ⁻¹²	
Fiber Length 9/125µm core SMF			km	1			
TRANSMITTER							
Input differential impedance	R _{in}		Ω		100		
Output Opt. Power	P _o		dBm	-8.4	-2.5	+0.5	
Optical Wavelength	λ		nm	1260		1350	
Spectral Width	σ		nm				
Optical Modulation Amplitude	OMA		uW	174			
Transmitter and Dispersion Penalty	TDP		dB			5.2	
RIN			dB/Hz			-128	
RECEIVER							
Sensitivity	R _{SENSr}	6.144Gb/s	mW			0.042	
	R _{SENS4}	4.715Gb/s	mW			0.042	
Average Received Power	Rx _{MAX}		dBm			+0.5	
Optical Center Wavelength	λ _c		nm	1260		1360	
Return Loss			dB	12			
LOS De-Assert	LOS _D		dBm			-19	
LOS Assert	LOS _A		dBm	-30			
LOS Hysteresis			dB	0.5			
Audio/MIC (Analog)							
Analog Sample Rate	F _{audio_a}		kHz		192		
Input level	Ain		V _{pp}		0.56V _{ss}		
Output level	Aout	V _{pp} =3.3V//Analog	V _{pp}		0.65		
Input Impedance			kΩ		25		
Output Impedance			Ω		100		

Optical & Electrical Characteristics

($T_{op} = 25^{\circ}C$)

Two (2) Multi-mode fibers standard




Parameters	Symbol	Condition	Unit	Min.	Typ.	Max.	Remark
Data Rate	BR		Gb/sec		8.5		
Bit Error Rate	BER					10^{-12}	
Fiber Length 50/125 μ m core MMF			m			300	
TRANSMITTER							
Input differential impedance	R_{in}		Ω		100		
Output Opt. Power. 50 or 62.5 MMF	P_o		dBm	-8.2			
Optical Wavelength	λ		nm	840		860	
Spectral Width	σ		nm			0.65	
Optical Modulation Amplitude	OMA	8.5Gb/s	μ W	302			
Optical Rise/Fall Time	P_r / P_f	2.125, 4.25Gb/s	ps			90	
Transmitter and Dispersion Penalty	TWDP	6.1Gb/s	dB			3.7	
Relative Intensity Noise	RIN		dB/Hz			-128	
RECEIVER							
Sensitivity	R_{XSENS}	8.5Gb/s	mW			76	
Average Received Power	R_{XMAX}		dBm	0			
Optical Center Wavelength	λ_c		nm	770		860	
Optical Return Loss			dB	12			
LOS De-Assert	LOS_D		dBm			-18	
LOS Assert	LOS_A		dBm	-30			
LOS Hysteresis			dB	0.5			
Audio/MIC (Analog)							
Analog Sample Rate	F_{audio_a}		kHz		192		
Input level	A_{in}		Vpp		0.56Vss		
Output level	A_{out}	Vpp=3.3V/Analog	Vpp		0.65		
Input Impedance			k Ω		25		
Output Impedance			Ω		100		

RS-232C Characteristics




Parameter	Symbol	Minimum	Typical	Maximum	Units
Data rate				250	kbps
Input voltage	R_{in}	-25		25	V
Output voltage	T_{out}		± 15		V

Drawing of transmitter and receiver

Dimension [mm]

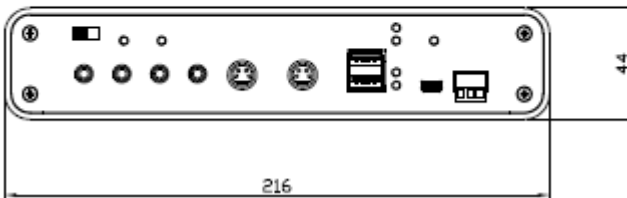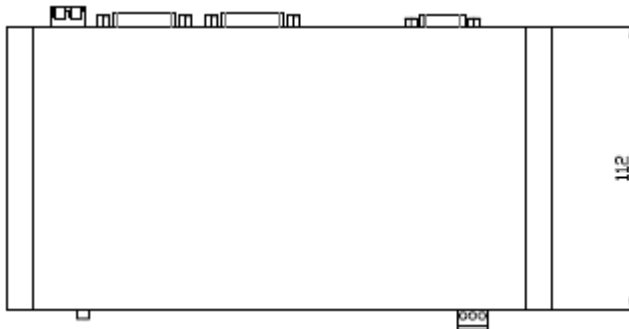

Transmitter

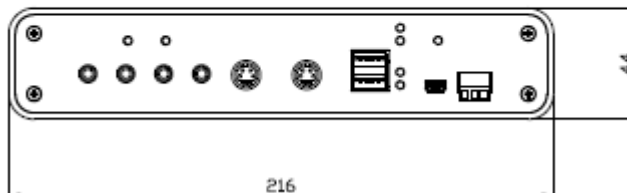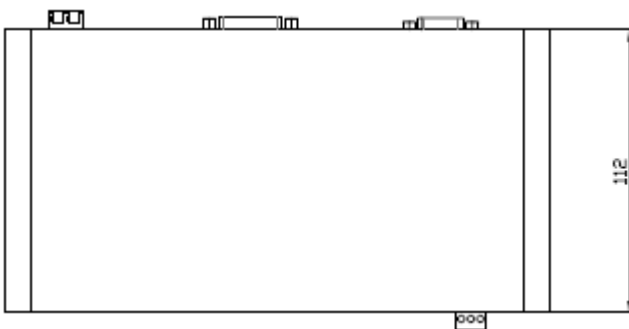

Receiver

DVI Pin Description

Pin	Symbol	Functional Description
1	CH2-	TMDS Data Signal Channel 2 Negative
2	CH2+	TMDS Data Signal Channel 2 Positive
3	GND	TMDS Data Signal Channel 2 Shield
4		
5		
6	DDC Clock	DDC Clock line for DDC2B communication
7	DDC Data	DDC Data line for DDC2B communication
8	N.C.	
9	CH1-	TMDS Data Signal Channel 1 Negative
10	CH1+	TMDS Data Signal Channel 1 Positive
11	GND	TMDS Data Signal Channel 1 Shield
12		
13		
14	5 V	5 V Input for Transmitter from Host 5 V Output for Monitor from Receiver
15	GND	Ground
16	Hot plug Detect	Signal is driven by monitor to enable the system to identify the presence of a monitor
17	CH0-	TMDS Data Signal Channel 0 Negative
18	CH0+	TMDS Data Signal Channel 0 Positive
19	GND	TMDS Data Signal Channel 0 Shield
20		
21		
22	GND	TMDS Clock Signal Shield
23	CLK+	TMDS Clock Channel Positive
24	CLK-	TMDS Clock Channel Negative

Note: Channels 3, 4 and 5 dual-link data signal pins are not used

RS-232C Pin Description

Pin	Symbol	Functional Description
1	Received Line Signal Detector	Connected with Pin4 & Pin6 in module
2	RD	Data Receive: Uplink \leftrightarrow Downlink
3	TD	Data Transmit: Uplink \leftrightarrow Downlink
4	Data Terminal Ready	Connected with Pin1 & Pin6 in module
5	GND	Signal Ground
6	Data Set Ready	Connected with Pin1 & Pin4 in module
7	Request To Send	Connected with Pin8 in module
8	Clear To Send	Connected with Pin7 in module
9	NC	

Reliability Test

Opticis utilizes three types of test criteria for a reduction of variability and a continuous improvement of the process by its FEMA (Failure Mode and Effective Analysis) program.

- 1) Temperature & humidity tests
- 2) EMI test (CE)

3) Temperature & Humidity Test Data

Heading	Test	Conditions	Duration	Sample Size	Failure	Remarks
Operating Test	Operating at each Temperature (See Note)	* 0 ~ 50 °C (Interval: 10 °C)	30 Min (Each Temperature)	n=3	0	Note: Visual Test on the Display
Storage Test	Low Temperature	* T _s = -30 °C	96 HR	n=3	0	1. TS: Storage Temperature
	High Temperature	* T _s = 70 °C	96 HR	n=3	0	2. RH: Relative Humidity
	High Humidity High Temperature	* T _s : 40 °C * RH: 95%	96 HR	n=3	0	

EMI Test Data

EMI: Meet CE class A

STANDARDS		CONDITIONS
EN 55 022 (CISPR22)	CE (Conducted Emission) & RE (Radiated Emission)	Meet Class A