




REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2018/08/09	

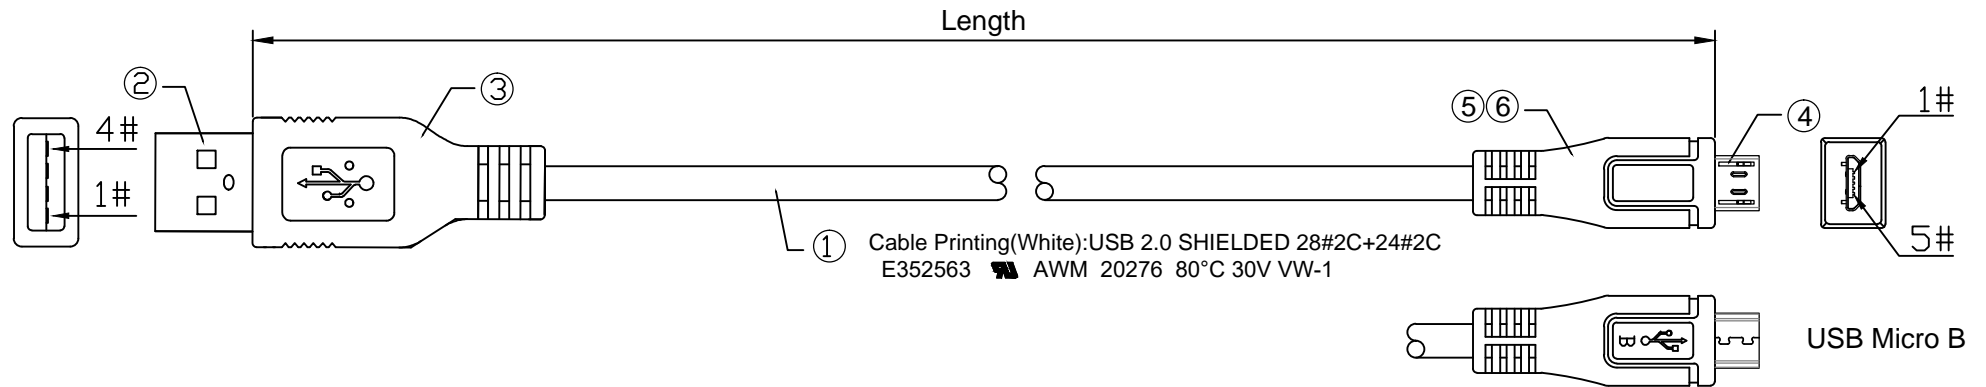

① Cable Printing(White):USB 2.0 SHIELDED 28#2C+24#2C
E352563 AWM 20276 80°C 30V VW-1

USB Micro B

CONNECTION

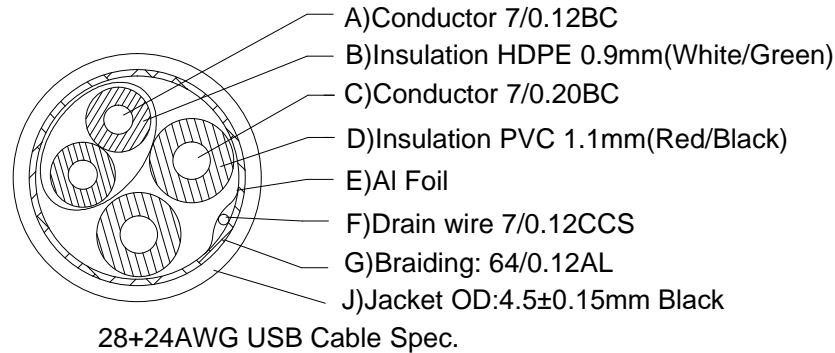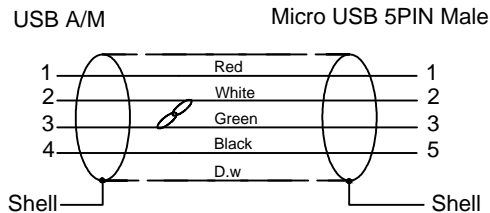


28+24AWG USB Cable Spec.

Remark:
1.100% Open/Short Test
2.Conductive Resistance:2ohms MAX
3.Insulation Resistance:5M ohm MIN.
4.The product is Reach/RoHS compliant.

Item NO.	Length(m)
SB0007	3.0m
SB0008	5.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑥	External Mold	Outer Mould 45P PVC, Black	1PC
⑤	Innernal Mold	Inner Mould PE	1PC
④	Connector	Micro USB Male, Nickle-Plated	1PC
③	External Mold	Outer Mould 45P PVC, Black	1PC
②	Connector	USB A Male, Nickle-Plated	1PC
①	Cable	28+24 USB Cable OD:4.5mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+7/0.12CCS+64/0.12ALB +OD4.5PVC Black	



ACT			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	28+24 USB A Male TO Micro B 5Pin	PAGE NO	1/1
		DATE	2018/08/09
APPROVAL		CHECKED	
		DRAWN	