

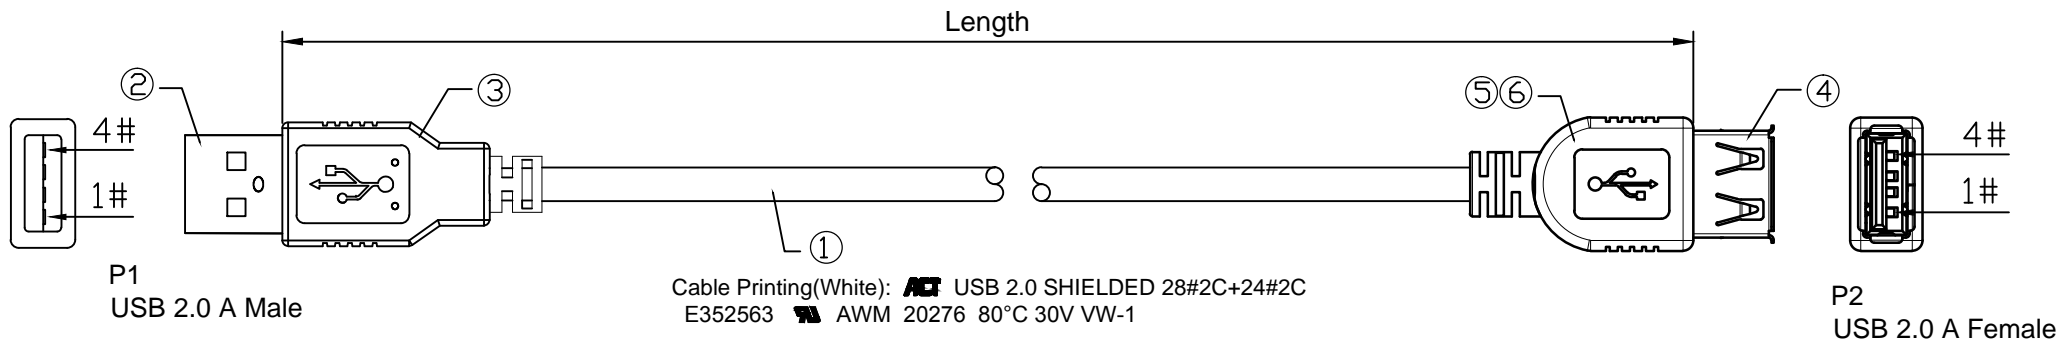


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2018/08/09	

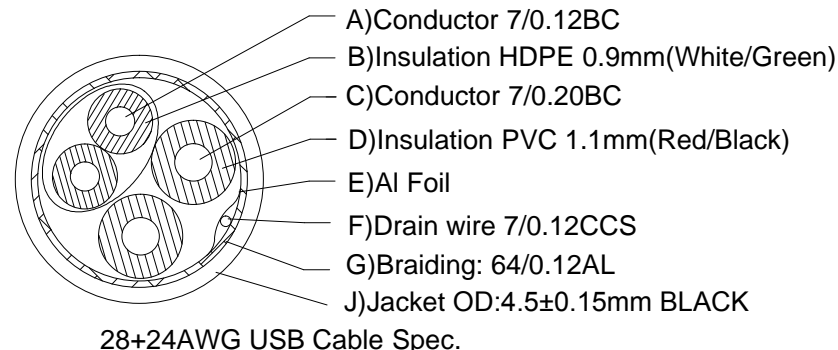

- Remark:
- 100% Open/Short Test
  - Conductive Resistance:10ohms MAX
  - Insulation Resistance:5M ohm MIN.
  - The product is Reach/RoHS compliant.

Item NO.	Length(m)
SB2218	0.5m
SB2220	1.8m
SB2230	3.0m
SB2250	5.0m

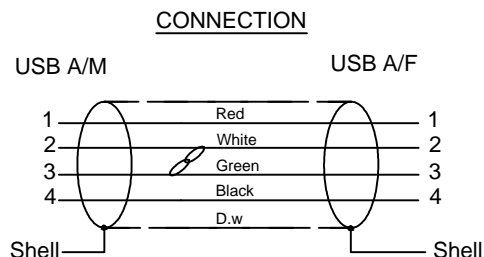





ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑥	External Mold	Outer Mold 45P PVC, BLACK	1PC
⑤	Internal Mold	Inner Mold PE	1PC
④	Connector	USB A Female, Nickle-Plated	1PC
③	External Mold	Outer Mold 45P PVC, BLACK	1PC
②	Connector	USB A Male, Nickle-Plated	1PC
①	Cable	28+24 USB Cable OD:4.5mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+7/0.12CCS+64/0.12ALB +OD4.5PVC BLACK	

TOLERANCES UNLESS OTHERWISE STATED

X. = ± 1  
 .X = ± 0.2  
 .XX = ± 0.1

<b>ACT</b>			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	28+24 USB A Male TO A Female	PAGE NO	1/1
		DATE	2018/08/09
APPROVAL		CHECKED	
		DRAWN	

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/01/27	

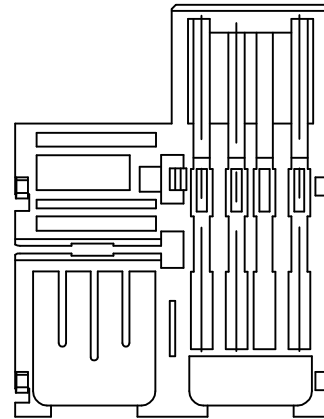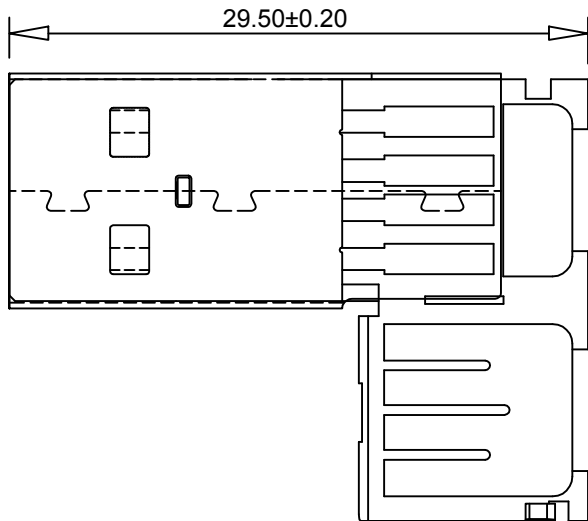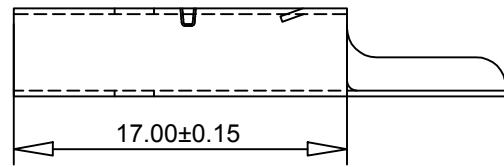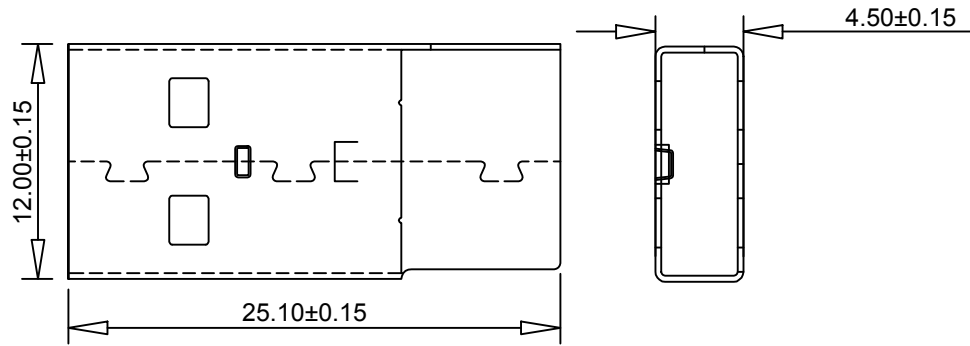

ERP NO.:		SAMPLE DWG NO.:	
ACT No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		PAGE NO	1/1
		DATE	2021/04/14
APPROVAL	CHECKED	DRAWN	