

Specifications subject to change without notification.

Icron | An Analog Devices Brand

#90-01040-D01

# USB 3.0 Spectra<sup>™</sup> 3022 Extender

2-Port USB 3.0 100m Multimode Fiber Extender System

The USB 3.0 Spectra<sup>™</sup> 3022 extends SuperSpeed USB 3.0 up to 100m (330 ft).\*



## **Features**

Take advantage of USB 3.0's blazing 5Gbps speeds up to 100m of distance over multimode fiber. Machine Vision cameras, security cameras, conferencing cameras and storage drives can be extended while providing isolation and security. Key features include:

- USB 3.0 extension up to 100m
- Delivers speed, isolation and security over multimode fiber
- Supports USB 3.0 throughputs of up to 5Gbps
- Integrated 2-port hub suitable for industrial environments
- Rugged locking USB and power connectors
- Enclosures with convenient pre-drilled holes for optional bracket mounting
- Works with AIA USB3 Vision™ compliant devices


Includes the ExtremeUSB® suite of features:

- Transparent USB extension
- True plug and play; no software drivers required
- Works with all major operating systems: Windows®, macOS™, Linux® and Chrome OS™

## **Applications**

- Machine Vision camera extension
- Post-production editing
- Remote storage

- Security camera extension
- Conferencing camera extension

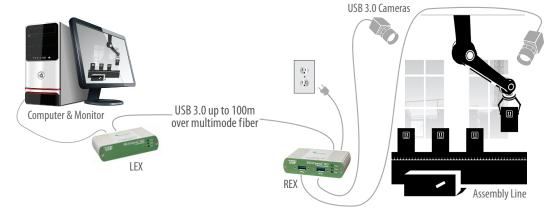

\* Up to 50m with USB 3.0 storage type devices; up to 100m or more is achievable when using USB 3.0 bulk traffic cameras. For Microsoft Kinect applications, please use the Spectra<sup>™</sup> 3001-15 active extension cable.

# **USB 3.0 Spectra**<sup>™</sup> 3022 Specifications

Multimode Fiber Class	Cameras	Storage
0M2	50m	50m
0M3	100m	50m

<sup>\*</sup> Up to 50m with USB 3.0 storage type devices; up to 100m or more is achievable when using USB 3.0 bulk traffic cameras.



Locking USB Receptacle



**Locking Power Connector** 



#### **RANGE\***

OM2 Multimode Fiber: Up to 50m (165 ft)
OM3 Multimode Fiber: Up to 100m (330 ft)

### **SPEEDS**

USB 3.0: Up to 5Gbps (Not backward compatible with USB 2.0/1.1)

#### LEX

USB Connector: 1 x USB 3.0 Type B Locking Receptacle

per AIA USB3 Vision<sup>™</sup> specification

Link Connector: 1 x Duplex LC Connector

Dimensions: 100mm x 76mm x 26mm (3.94" x 2.99" x 1.02")

Enclosure Material: Silver Anodized Aluminum

**REX** 

USB Connectors: 2 x USB 3.0 Type A Locking Receptacles

per AIA USB3 Vision™ specification

Link Connector: 1 x Duplex LC Connector

Dimensions: 100mm x 76mm x 26mm (3.94" x 2.99" x 1.02")

Enclosure Material: Silver Anodized Aluminum

Power Connector: 24V DC, 1A, Locking, 2.5 mm, center-positive

Available Current: 900mA for each USB Port Power Supply: 100-240V AC Brick, Locking

#### **ENVIRONMENTAL**

Operating Temperature: 0°C to 50°C (32°F to 122°F)
Storage Temperature: -20°C to 70°C (-4°F to 158°F)

Operating Humidity: 20% to 80% relative humidity, non-condensing Storage Humidity: 10% to 90% relative humidity, non-condensing

COMPLIANCE

Certifications: FCC (Class B), CE (Class B), RoHS2/3 (CE), ICES-003 Issue 7,

EN 62368-1

Machine Vision: Works with AIA USB3 Vision™ compliant devices

**SUPPORT** 

Warranty: 2-year

## **Ordering Information**

The USB 3.0 Spectra™ 3022 extender system includes a LEX, REX, USB 3.0 cable, locking power adapter, country specific power cord, Quick Start Guide and two-year warranty. For more information, please contact www.icron.com/contact or call +1 604 638 3920, or visit www.icron.com/where-to-buy to locate a distributor/reseller in your area.

PART #	NAME	DESCRIPTION
00-00327	USB 3.0 Spectra <sup>™</sup> 3022 - NA	2-Port 100m Fiber USB 3.0 Extender System, 100-240V Power Adapter, Locking NA Power Cord
00-00328	USB 3.0 Spectra™ 3022 - EU	2-Port 100m Fiber USB 3.0 Extender System, 100-240V Power Adapter, Locking EU Power Cord
00-00329	USB 3.0 Spectra™ 3022 - UK	2-Port 100m Fiber USB 3.0 Extender System, 100-240V Power Adapter, Locking UK Power Cord
00-00330	USB 3.0 Spectra™ 3022 - AU	2-Port 100m Fiber USB 3.0 Extender System, 100-240V Power Adapter, Locking AU Power Cord
00-00371	USB 3.0 Spectra™ 3022 - JP	2-Port 100m Fiber USB 3.0 Extender System, 100-240V Power Adapter, Locking JP Power Cord
10-00406	USB Mounting Kit - Silver	Silver USB Extender Mounting Kit compatible with 2304, 2324, 2344, and 3022 Kit includes: 2 brackets, 4 locking washers and 4 (M3 x 5mm) Phillips pan head screws (Order: 1 kit per LEX or REX; 2 kits per system)