



**ELECTRICAL TEST:**

- 1.100% OPEN SHORT MIS WIRE TEST
- 2.CONTACT RESISTANCE:3 OHM MAX
- 3.INSULATION RESISTANCE:5M OHM MIN
- 4.HI-POT TEST:DC 300V/10ms
- 5.PASS 1080P TEST

CONSUMER ITEM	LENGTH(mm)
AC7515	150±20

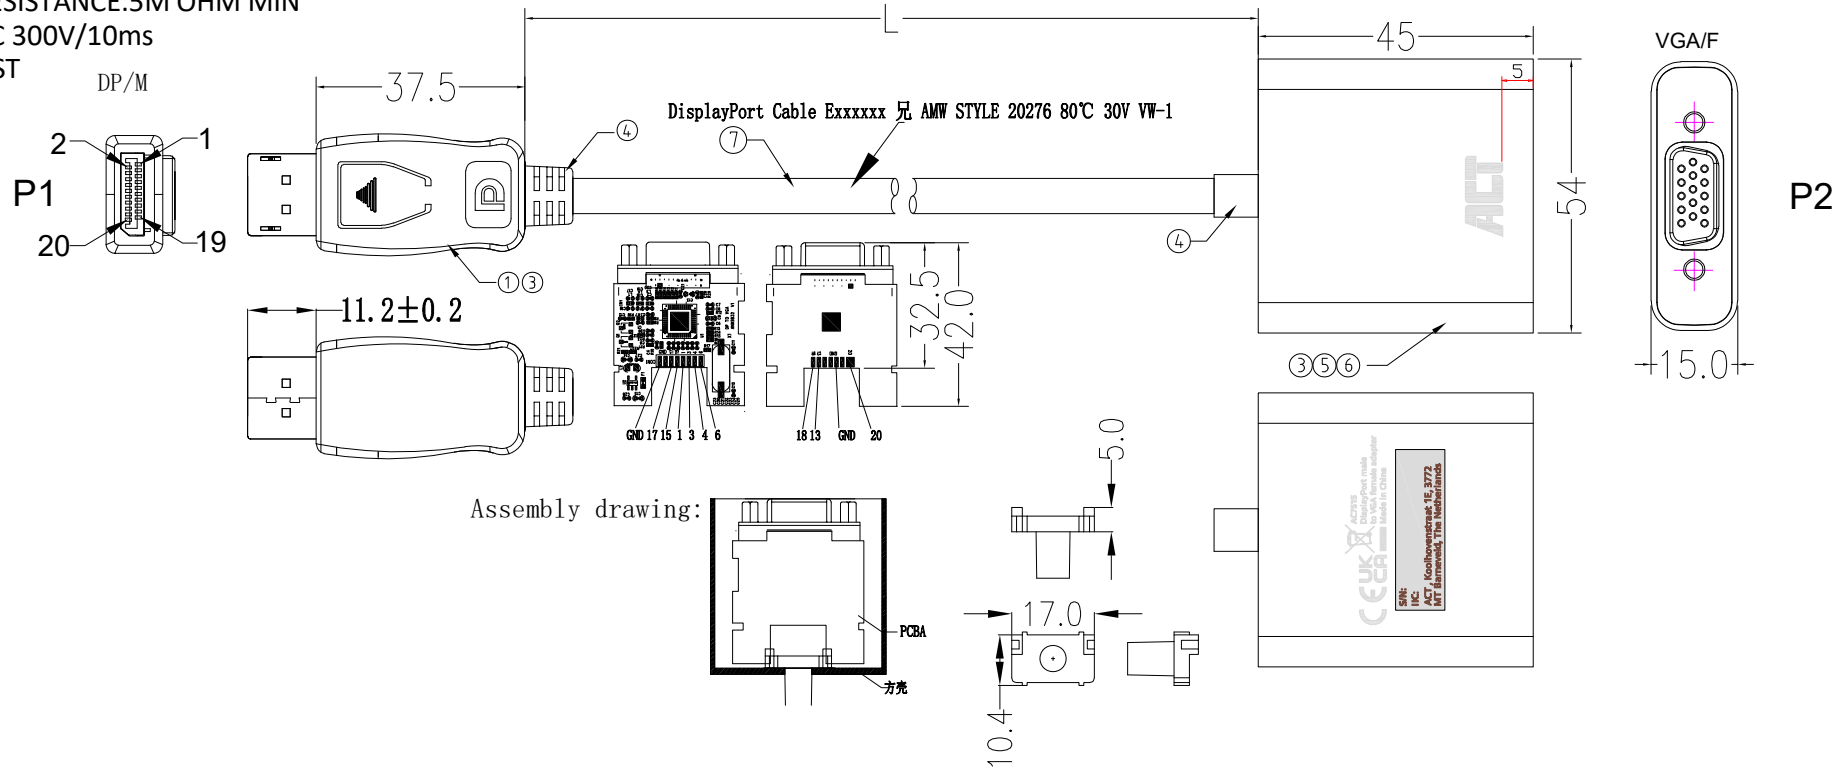

Assembly drawing:




CE UK CA  
AC7515  
DisplayPort male  
to VGA female adapter  
Made in China

**ACT**  
Silk: Pantone Cool Gray 6C  
27,2mm x 8,9mm  
Silk: Pantone Cool Gray 6C  
13mm x 6mm

S/N:  
I/C:  
ACT, Koolhovenstraat 1E, 3772  
MT Barneveld, The Netherlands

Bottomlabel: Pantone 429  
30mm x 9,1mm

⑦	Cable	UL20276 #32*5P+#32*5C+AEB BLACK PVC JACKET, OD:5.0mm	M
⑥	SHELL	VGA/F BLACK PVC FRONT COVER SHELL	1PCS
⑤	SHELL	VGA/F BLACK PVC SHELL	1PCS
④	outer molding	BLACK PVC 45P	20g
③	inner molding	PE,Nature color	10g
②	PLUG	VGA/F:PIN G/F, Blue PVC CORE, Nickel plating PLATED SHELL+PCB (ANX9832)	1PCS
①	PLUG	DP 20P/M:PIN G/F, BLACK PVC CORE, Nickel plating WITH LOCK	1PCS
NO.	PART NAME	DESCRIPTION	UNIT

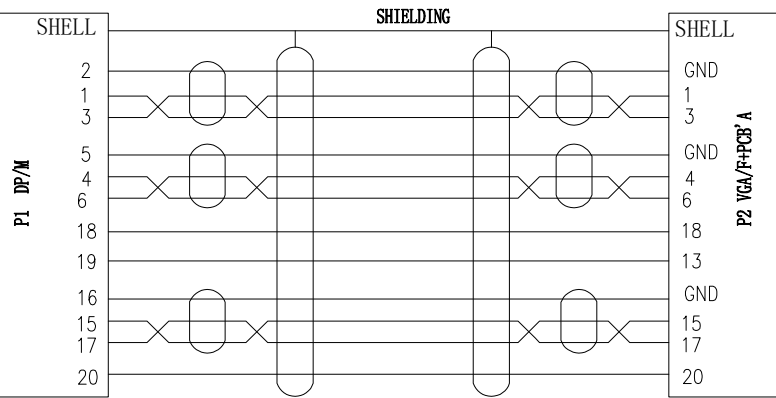

<b>ACT</b>				DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	FIT	UNITS: MM	1RD ANGLE
				MODEL NO.		△			
APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO.		△			
				FINISHING		△			
				MATERIAL		SYM	DATE		REVISION